




STEP

| | | | | | | |
|--------------|--|--|--|--|--|--|
| Item code | 86.ORB2.1351.06 | | | | | |
| Product type | Outdoor | | | | | |
| Category | Recessed Wall & Ceiling | | | | | |
| Family | STEP | | | | | |
| Pictograms | <div><div></div><div>50 60 Hz</div><div>220 240 V</div><div></div><div>IK 10</div></div> <div><div>CRI 80</div><div>SDCM 3</div><div>CE</div><div>Driver INCL</div><div></div></div> <div><div>50000h L70B10</div><div>IP 65</div></div> | | | | | |

Dimensions

Product dimensions (mm) ø78.5x73mm

Scheme

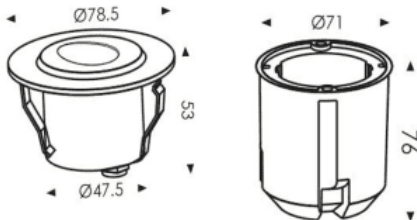

| | |
|----------------------------|---------------|
| Product | |
| Real power (W) | 2 |
| Real luminous flux (Lm) | 60 |
| Luminous efficiency (Lm/W) | 30 |
| Beam angle (°) | Assymetric 45 |
| Life time (h) | 50000h L70B10 |
| IP | IP65 |
| Control gear | ON-OFF |
| Colour temperature (K) | 3000 |
| Colour consistency (SDCM) | SDCM3 |
| CRI | 80 |
| IK | IK10 |

Photometry

