






STARO-S


Item code	86.OC03.1311.01					
Product type	Outdoor					
Category	Surface Ceiling Downlight					
Family	STARO-S					
Pictograms	<div><div></div><div><div>220 240 V</div></div><div><div></div><div>850°</div></div><div><div>CRI</div><div>90</div></div><div></div></div> <div><div>On Off</div><div><div>IP</div><div>20</div></div><div><div>50000h L80B10</div></div></div>					

Product	
Real power (W)	10
Real luminous flux (Lm)	900
Luminous efficiency (Lm/W)	90
Beam angle (°)	24
Life time (h)	50000h L80B10
IP	IP65
Control gear	ON-OFF
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	90
IK	IK06

Dimensions

Product dimensions (mm) 151X91X49 mm

Scheme

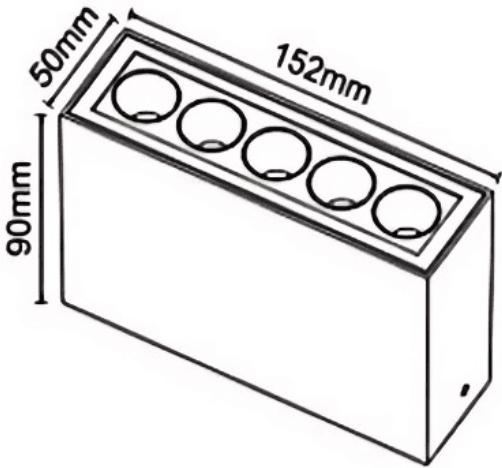

Photometry

**SURFACE CEILING DOWNLIGHT -  
STARO-S**

**Item code 86.OC03.1311.01**

