




STARO-S

| | | | | | | |
|--------------|---|--|--|--|--|--|
| Item code | 86.OC03.1331.01 | | | | | |
| Product type | Outdoor | | | | | |
| Category | Surface Ceiling Downlight | | | | | |
| Family | STARO-S | | | | | |
| Pictograms | <div><div></div><div>220 240 V</div><div></div><div>850°</div><div>CRI 90</div><div>CE</div><div>On Off</div><div>IP 20</div><div>50000h L80B10</div></div> | | | | | |

Dimensions

Product dimensions (mm)151X91X49 mm

Scheme

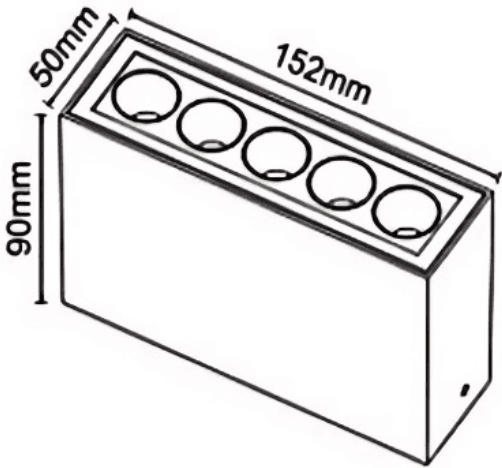

Product

| | |
|----------------------------|---------------|
| Real power (W) | 10 |
| Real luminous flux (Lm) | 900 |
| Luminous efficiency (Lm/W) | 90 |
| Beam angle (°) | 36 |
| Life time (h) | 50000h L80B10 |
| IP | IP65 |
| Control gear | ON-OFF |
| Colour temperature (K) | 3000 |
| Colour consistency (SDCM) | SDCM3 |
| CRI | 90 |
| IK | IK06 |

Photometry

**SURFACE CEILING DOWNLIGHT -
STARO-S**

Item code 86.OC03.1331.01

