




UP&DOWNNT

|              |                 |                 |      |                  |           |  |
|--------------|-----------------|-----------------|------|------------------|-----------|--|
| Item code    | 86.OW09.1341.02 |                 |      |                  |           |  |
| Product type | Outdoor         |                 |      |                  |           |  |
| Category     | Wall Light      |                 |      |                  |           |  |
| Family       | UP&DOWNNT       |                 |      |                  |           |  |
| Pictograms   |                 | 50<br>60 Hz     | 850° | CRI<br>80        | SDCM<br>3 |  |
|              | CE              | Driver<br>INCL. |      | 50000h<br>L70B10 | IP<br>65  |  |
|              | IK<br>05/10     |                 |      |                  |           |  |

Dimensions

Product dimensions (mm)      ø53x73x160mm

Scheme

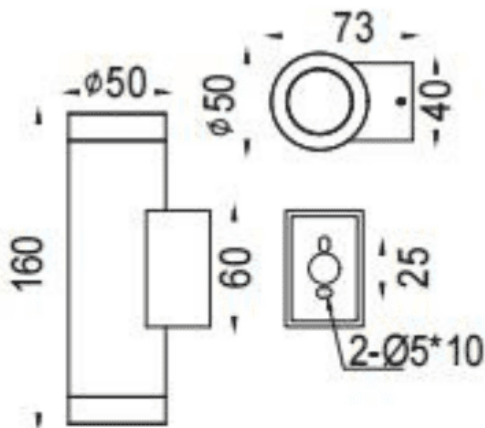

|                            |               |
|----------------------------|---------------|
| Product                    |               |
| Real power (W)             | 2x4,1         |
| Real luminous flux (Lm)    | 2x285         |
| Luminous efficiency (Lm/W) | 82.5          |
| Beam angle (°)             | 60            |
| Life time (h)              | 50000h L70B10 |
| IP                         | IP65          |
| Control gear               | ON-OFF        |
| Colour temperature (K)     | 3000          |
| Colour consistency (SDCM)  | SDCM<3        |
| CRI                        | 80            |
| IK                         | IK05          |

Photometry

