

ING-AD




|              |   |
|--------------|---|
| Item code    | 86.OI20.3311.07   |
| Product type | Outdoor   |
| Category     | Recessed Inground Floor   |
| Family       | ING   |
| Subfamily    | ING-AD  |
| Pictograms   | <div><div></div><div>50<br/>60 Hz</div><div>220<br/>240 V</div><div></div><div>850°</div><div>IK<br/>10</div></div> <div><div>CRI<br/>80</div><div>SDCM<br/>3</div><div>CE</div><div>Driver<br/>INCL</div><div></div></div> <div><div>IP<br/>66</div><div>50000h<br/>L80B10</div></div> |

Dimensions

Product dimensions (mm)                   ø160x153mm

Scheme

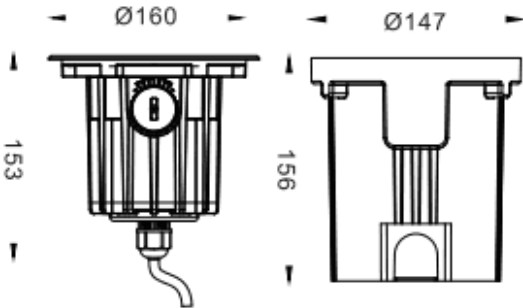

|                            |                    |
|----------------------------|--------------------|
| Product                    |                    |
| Real power (W)             | 12.8               |
| Real luminous flux (Lm)    | 920                |
| Luminous efficiency (Lm/W) | 71.900000000000006 |
| Beam angle (°)             | 3                  |
| Life time (h)              | 50000h L80B10      |
| IP                         | 67                 |
| Control gear               | ON-OFF             |
| Colour temperature (K)     | 3000               |
| Colour consistency (SDCM)  | SDCM<3             |
| CRI                        | 80                 |
| IK                         | IK10               |