

ING-AD




| | |
|--------------|--|
| Item code | 86.OI20.3331.07 |
| Product type | Outdoor |
| Category | Recessed Inground Floor |
| Family | ING |
| Subfamily | ING-AD |
| Pictograms | <div><div></div><div>50 60 Hz</div><div>220 240 V</div><div></div><div>850°</div><div>IK 10</div></div> <div><div>CRI 80</div><div>SDCM 3</div><div>CE</div><div>Driver INCL</div><div>On Off</div></div> <div><div></div><div>50000h L80B10</div><div>IP 67</div></div> |

Dimensions

Product dimensions (mm) ø160x153mm

Scheme

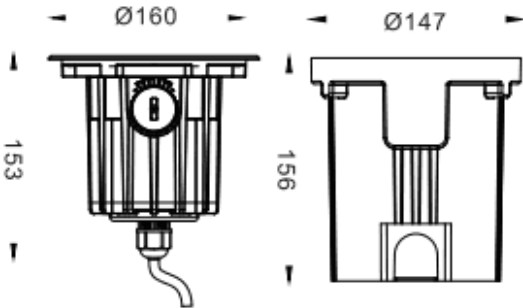

| | |
|----------------------------|--------------------|
| Product | |
| Real power (W) | 12.8 |
| Real luminous flux (Lm) | 920 |
| Luminous efficiency (Lm/W) | 71.900000000000006 |
| Beam angle (°) | 25 |
| Life time (h) | 50000h L80B10 |
| IP | 67 |
| Control gear | ON-OFF |
| Colour temperature (K) | 3000 |
| Colour consistency (SDCM) | SDCM3 |
| CRI | 80 |
| IK | IK10 |