

ING-AD




|              |  |
|--------------|--|
| Item code    | 86.OI20.3341.07  |
| Product type | Outdoor  |
| Category     | Recessed Inground Floor  |
| Family       | ING  |
| Subfamily    | ING-AD   |
| Pictograms   | <div><div></div><div>50<br/>60 Hz</div><div>220<br/>240 V</div><div></div><div>850°</div><div>IK<br/>10</div></div> <div><div>CRI<br/>80</div><div>SDCM<br/>3</div><div>CE</div><div>Driver<br/>INCL</div><div>On<br/>Off</div></div> <div><div></div><div>50000h<br/>L80B10</div><div>IP<br/>67</div></div> |

Dimensions

Product dimensions (mm)                   ø160x153mm

Scheme

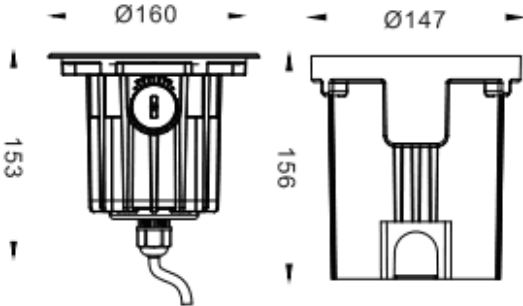

|                            |                    |
|----------------------------|--------------------|
| Product                    |                    |
| Real power (W)             | 12.8               |
| Real luminous flux (Lm)    | 920                |
| Luminous efficiency (Lm/W) | 71.900000000000006 |
| Beam angle (°)             | 40                 |
| Life time (h)              | 50000h L80B10      |
| IP                         | 67                 |
| Control gear               | ON-OFF             |
| Colour temperature (K)     | 3000               |
| Colour consistency (SDCM)  | SDCM3              |
| CRI                        | 80                 |
| IK                         | IK10               |

Photometry

