




Waterproof

|              |                                                                                                                                                                                                      |
|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Item code    | 86.D130.1441.01                                                                                                                                                                                      |
| Product type | Indoor                                                                                                                                                                                               |
| Category     | Downlights                                                                                                                                                                                           |
| Family       | Waterproof                                                                                                                                                                                           |
| Subfamily    | Waterproof                                                                                                                                                                                           |
| Pictograms   | <div><div></div><div>220<br/>240 V</div><div>CRI<br/>80</div><div>SDCM<br/>3</div><div>CE</div><div>Driver<br/>INCL</div><div>On<br/>Off</div><div>50000h<br/>L80B10</div><div>IP<br/>65</div></div> |

Dimensions

Product dimensions (mm) ø110\*65mm cut size: ø100mm

Scheme

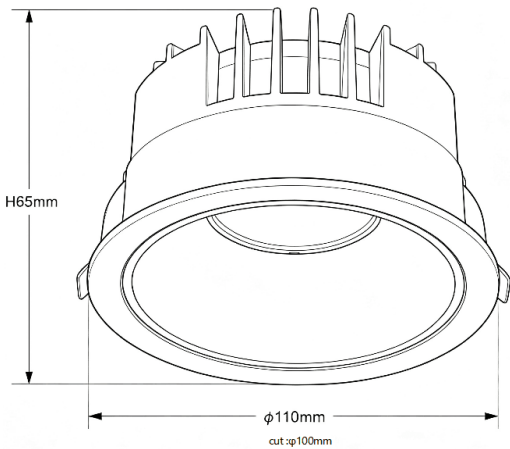

|                            |          |
|----------------------------|----------|
| Product                    |          |
| Real power (W)             | 15       |
| Real luminous flux (Lm)    | 1275     |
| Luminous efficiency (Lm/W) | 85       |
| Beam angle (°)             | 55       |
| IP                         | 65.0     |
| Electrical feeding         | 180-240V |
| Control gear               | ON-OFF   |
| Colour temperature (K)     | 4000     |
| Colour consistency (SDCM)  | SDCM5    |
| CRI                        | 90       |