




Scheme



Photometry

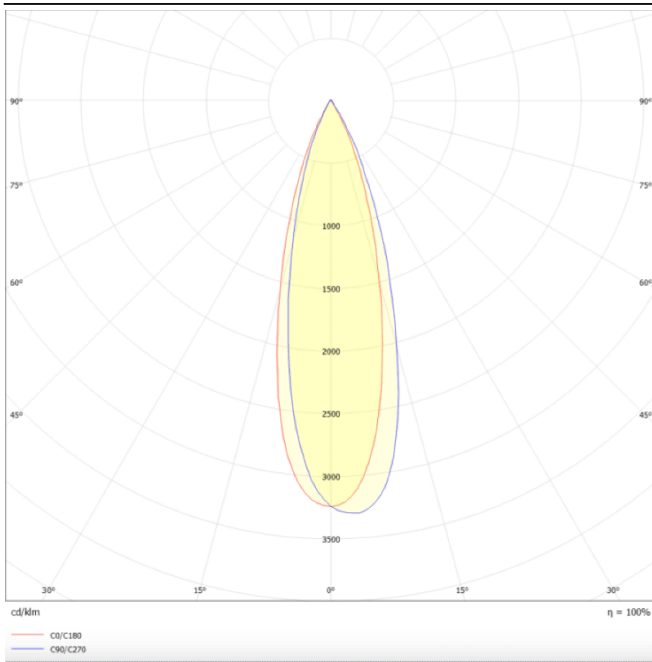

TUBULAR

| | |
|--------------|-----------------|
| Item code | 86.S001.2421.02 |
| Product type | Indoor |
| Category | Pendants |
| Family | TUBULAR |

| | | | | | | |
|-------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Pictograms |  | 220 240 V |  | 850° |  |  |
| | On Off |  | IP 20 | 50000h L80B10 | | |

| Product | |
|----------------------------|---------------|
| Real power (W) | 12 |
| Real luminous flux (Lm) | 1080 |
| Luminous efficiency (Lm/W) | 90 |
| Beam angle (°) | 24 |
| Life time (h) | 50000h L80B10 |
| IP | 20 |
| Chip Brand | Philip |
| Control gear | ON-OFF |
| Colour temperature (K) | 4000 |
| Colour consistency (SDCM) | SDCM<3 |
| CRI | 80 |