


## BELL

| | |
|---|---|
| **Item code** | **86.S002.3331.03** |
| **Product type** | **Decorative** |
| **Category** | **Pendants** |
| **Family** | **BELL** |
| **Pictograms** |  |




| | |
|---|---|
| **Product** | |
| **Real power (W)** | **30** |
| **Real luminous flux (Lm)** | **2700** |
| **Luminous efficiency (Lm/W)** | **90** |
| **Beam angle (º)** | **50** |
| **Life time (h)** | **50000h L80B10** |
| **IP** | **20** |
| **Chip Brand** | **Philip** |
| **Control gear** | **ON-OFF** |
| **Colour temperature (K)** | **3000** |
| **Colour consistency (SDCM)** | **SDCM3** |
| **CRI** | **80** |

## Scheme

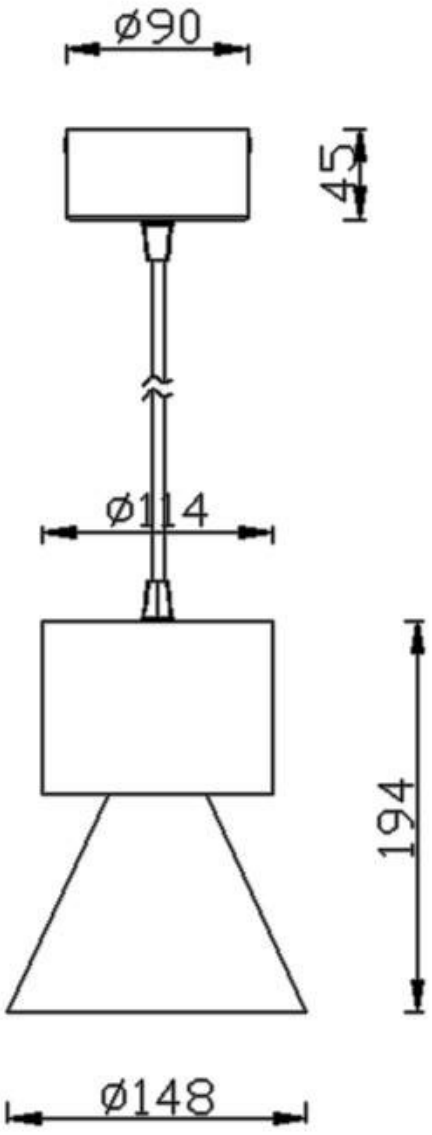

## Photometry

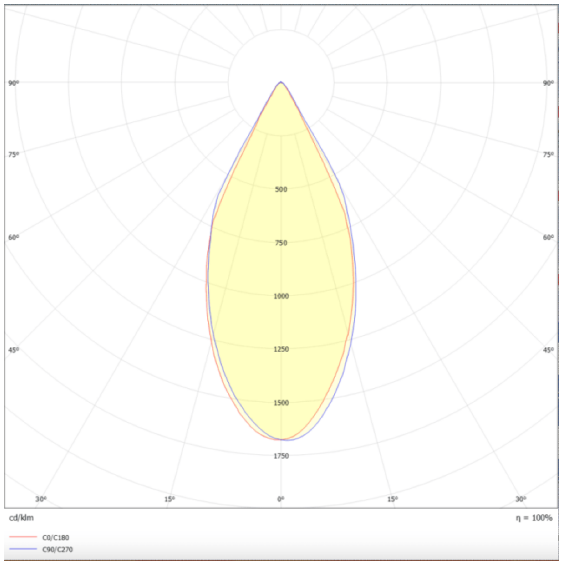
90°
90°
75°
75°
60°
60°
45°
45°
500
750
1000
1250
1500
1750
30°
15°
0°
15°
30°
cd/klm
η = 100%
C0/C180
C90/C270