











B-PANEL

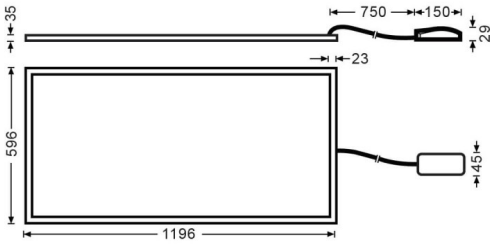


| | | | | | |
|--------------|---|---|---|---|---|
| Item code | 86.R002.3403.01 | | | | |
| Product type | Indoor | | | | |
| Category | Recessed Fixtures | | | | |
| Family | B-PANEL | | | | |
| Pictograms |  |  |  |  |  |
| |  |  |  |  |  |

Dimensions

Product dimensions (mm) 1196x596x35

Scheme



| | |
|----------------------------|---------------|
| Product | |
| Real power (W) | 55 |
| Real luminous flux (Lm) | 7040 |
| Luminous efficiency (Lm/W) | 128 |
| Beam angle (°) | 120 |
| Life time (h) | 50000h L80B10 |
| IP | 20 / 40 |
| Chip Brand | Seoul |
| Control gear | DALI |
| Colour temperature (K) | 4000 |
| Colour consistency (SDCM) | SDCM3 |
| CRI | 80 |

Photometry

