





Dimensions

| | |
|-------------------------|-------------|
| Product dimensions (mm) | Ø117X115 mm |
|-------------------------|-------------|

Scheme

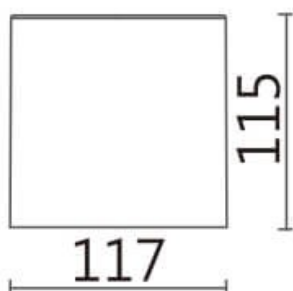

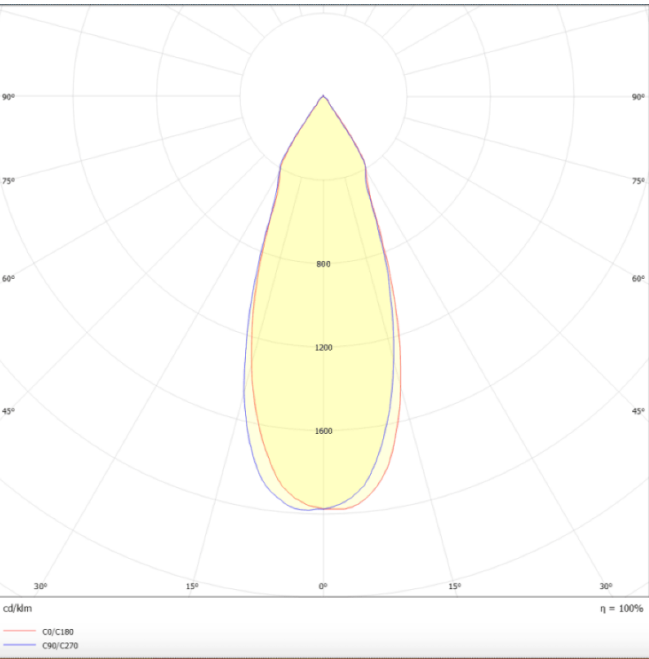




Photometry






TUBULAR-S

| | |
|--------------|--------------------|
| Item code | 86.SD01.1331.01 |
| Product type | Indoor |
| Category | Surface Downlights |
| Family | TUBULAR-S |

Pictograms





| | |
|----------------------------|---------------|
| Product | |
| Real power (W) | 15 |
| Real luminous flux (Lm) | 1200 |
| Luminous efficiency (Lm/W) | 80 |
| Beam angle (°) | 50 |
| Life time (h) | 50000h L80B10 |
| IP | IP20 |
| Chip Brand | Philip |
| Control gear | ON-OFF |
| Average life time (h) | 30 |
| Colour temperature (K) | 3000 |
| Colour consistency (SDCM) | SDCM<3 |
| CRI | 80 |