














CONNECT

| | |
|--------------|---|
| Item code | 86.I001.2403.01 |
| Product type | Indoor |
| Category | Industrial |
| Family | CONNECT |
| Subfamily | CONNECT |
| Pictograms | <div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div> |

Scheme



Photometry

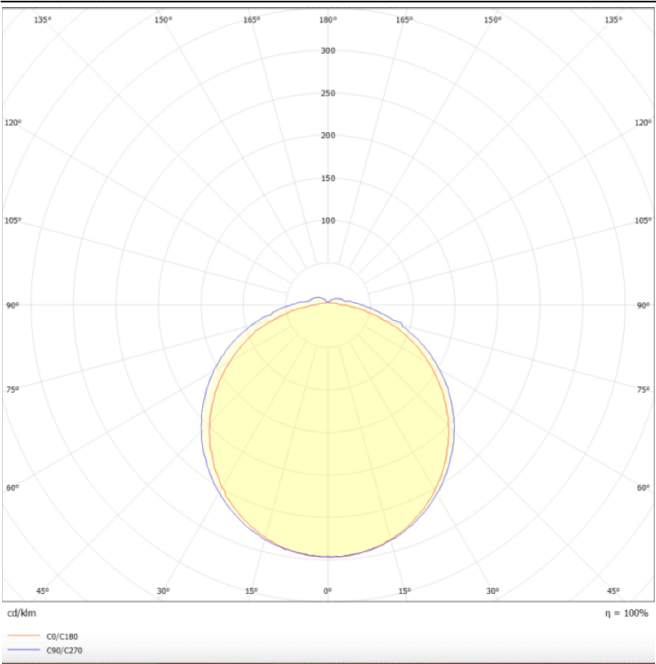

Product

| | |
|----------------------------|---------------|
| Real power (W) | 30 |
| Real luminous flux (Lm) | 3400 |
| Luminous efficiency (Lm/W) | 113 |
| Beam angle (°) | 120 |
| Life time (h) | 50000h L80B10 |
| IP | 66 |
| Control gear | DALI |
| Colour temperature (K) | 4000 |
| Colour consistency (SDCM) | SDCM<3 |
| CRI | 80 |