










CONNECT

Item code	86.I001.3403.01
Product type	Indoor
Category	Industrial
Family	CONNECT
Subfamily	CONNECT
Pictograms	<div><div></div><div><div>220 240 V</div><div></div><div><div>CRI 80</div><div></div></div></div><div><div></div><div><div>On Off</div><div></div><div><div>IP 66</div><div><div>50000h L80B10</div></div></div></div></div></div>

Scheme



Photometry

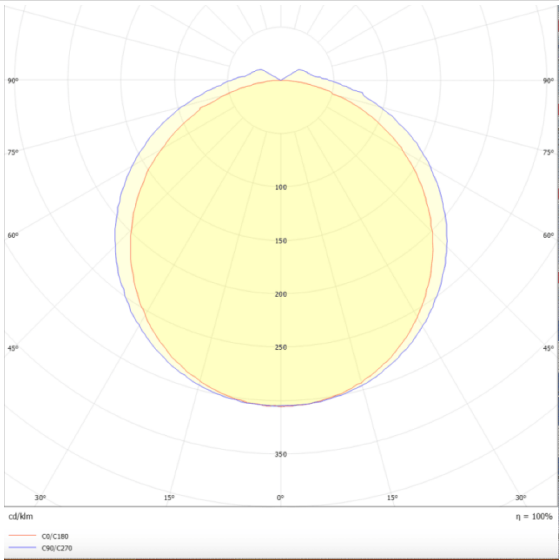

Product	
Real power (W)	40
Real luminous flux (Lm)	4800
Luminous efficiency (Lm/W)	120
Beam angle (°)	120
Life time (h)	50000h L80B10
IP	66
Control gear	DALI
Colour temperature (K)	4000
Colour consistency (SDCM)	SDCM<3
CRI	80