






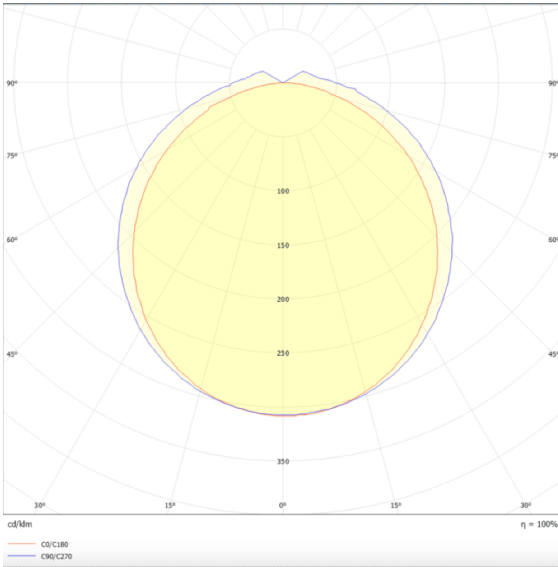
CONNECT

Item code	86.I001.4403.01
Product type	Indoor
Category	Industrial
Family	CONNECT
Subfamily	CONNECT
Pictograms	<div><div></div><div><div>220 240</div><div>V</div></div><div><div></div><div>850°</div></div><div><div>CRI</div><div>80</div></div><div><div>CE</div></div><div><div></div><div>01</div></div><div><div>On</div><div>Off</div></div><div><div>DALI</div></div><div><div>IP</div><div>66</div></div><div><div>50000h</div><div>L80B10</div></div></div>

Scheme



Photometry



Product

Real power (W)	50
Real luminous flux (Lm)	6000
Luminous efficiency (Lm/W)	120
Beam angle (°)	120
Life time (h)	50000h L80B10
IP	66
Control gear	DALI
Colour temperature (K)	4000
Colour consistency (SDCM)	SDCM<3
CRI	80