


## CONNECT

| | |
|---|---|
| **Item code** | **86.I002.2403.01** |
| **Product type** | **Indoor** |
| **Category** | **Industrial** |
| **Family** | **CONNECT** |
| **Subfamily** | **CONNECT** |
| **Pictograms** |  |

## Scheme




## Photometry

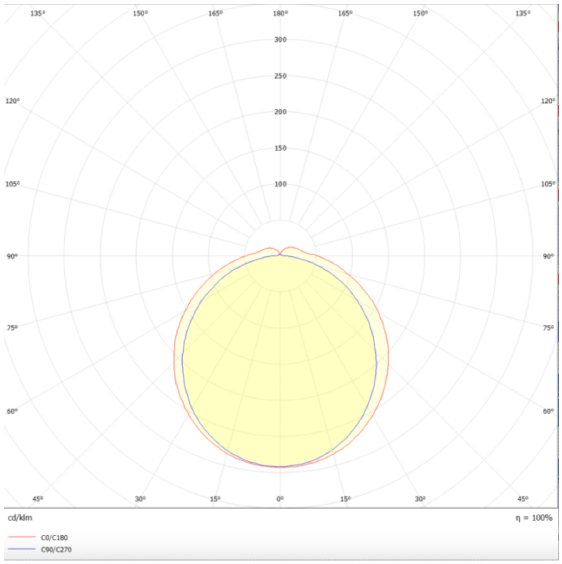


| Product | |
|---|---|
| **Real power (W)** | **30** |
| **Real luminous flux (Lm)** | **4800** |
| **Luminous efficiency (Lm/W)** | **160** |
| **Beam angle (º)** | **120** |
| **Life time (h)** | **50000h L80B10** |
| **IP** | **66** |
| **Control gear** | **DALI** |
| **Colour temperature (K)** | **4000** |
| **Colour consistency (SDCM)** | **SDCM3** |
| **CRI** | **80** |