













CONNECT

|              |  |
|--------------|--|
| Item code    | 86.I002.7403.01  |
| Product type | Indoor   |
| Category     | Industrial   |
| Family       | CONNECT  |
| Subfamily    | CONNECT  |
| Pictograms   |     <br>    |

Scheme



Photometry

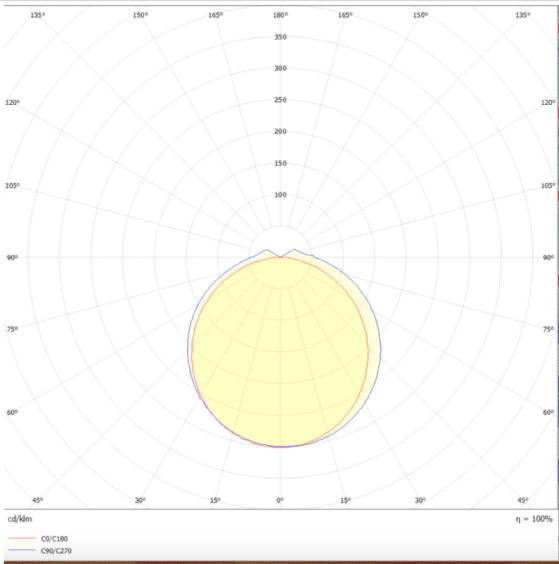

Product

|                            |               |
|----------------------------|---------------|
| Real power (W)             | 60            |
| Real luminous flux (Lm)    | 8400          |
| Luminous efficiency (Lm/W) | 140           |
| Beam angle (°)             | 120           |
| Life time (h)              | 50000h L80B10 |
| IP                         | 66            |
| Control gear               | DALI          |
| Colour temperature (K)     | 4000          |
| Colour consistency (SDCM)  | SDCM3         |
| CRI                        | 80            |