






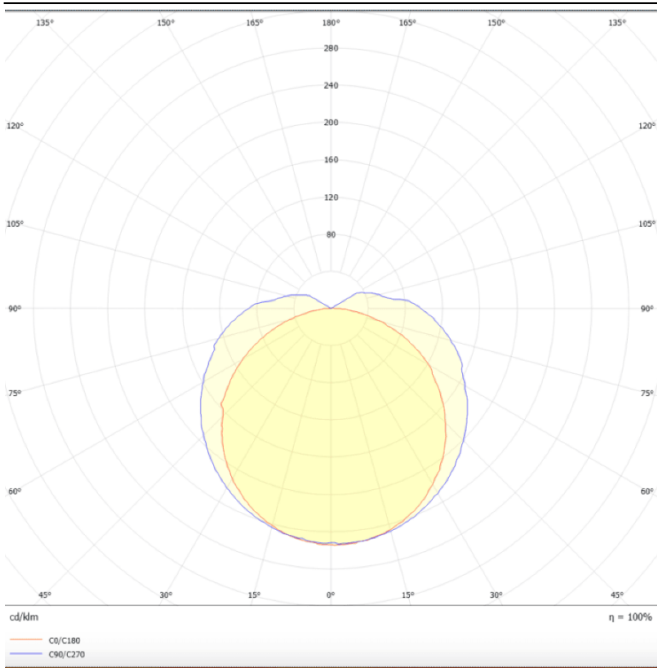
TUBEPROOF

Item code	86.I008.1403.01
Product type	Indoor
Category	Industrial
Family	TUBEPROOF
Subfamily	TUBEPROOF
Pictograms	<div><div></div><div>220 240 V</div><div></div><div>IK 09</div><div>CRI 80</div><div></div><div></div><div>On Off</div><div></div><div>IP 69</div><div>50000h L80B10</div></div>

Scheme



Photometry



Product	
Real power (W)	22
Real luminous flux (Lm)	3300
Luminous efficiency (Lm/W)	150
Beam angle (°)	130
Life time (h)	50000h L80B10
IP	69
Control gear	DALI
Colour temperature (K)	4000
Colour consistency (SDCM)	SDCM<3
CRI	80