



TUBEPROOF

Item code	86.I008.1403.01
Product type	Indoor
Category	Industrial
Family	TUBEPROOF
Subfamily	TUBEPROOF
Pictograms	<div><div></div><div>220 240 V</div><div></div><div>IK 09</div><div>CRI 80</div><div>CE</div><div></div><div>On Off</div><div>DALI</div><div>IP 69</div><div>50000h L90B10</div></div>


Dimensions

Product dimensions (mm)	120x86x600mm
-------------------------	--------------

Scheme



Photometry

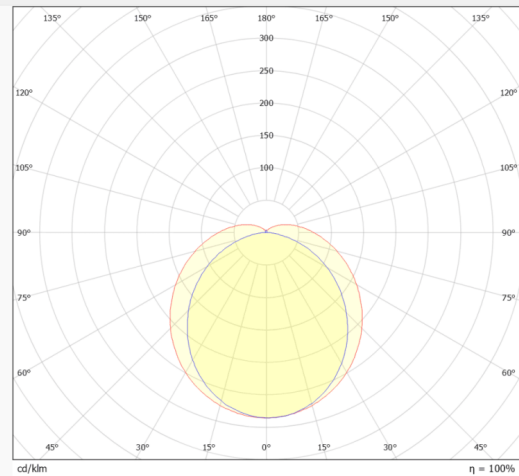

Product	
Real power (W)	20
Real luminous flux (Lm)	3300
Luminous efficiency (Lm/W)	165
Beam angle (°)	120°
Life time (h)	60,000hrs-L90B50
IP	66
Control gear	DALI
Colour temperature (K)	4000
Colour consistency (SDCM)	SDCM<3
CRI	80
IK	IK10

