














TUBEPROOF

Item code	86.I008.2401.01
Product type	Indoor
Category	Industrial
Family	TUBEPROOF
Subfamily	TUBEPROOF
Pictograms	<div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div>

Scheme



Photometry

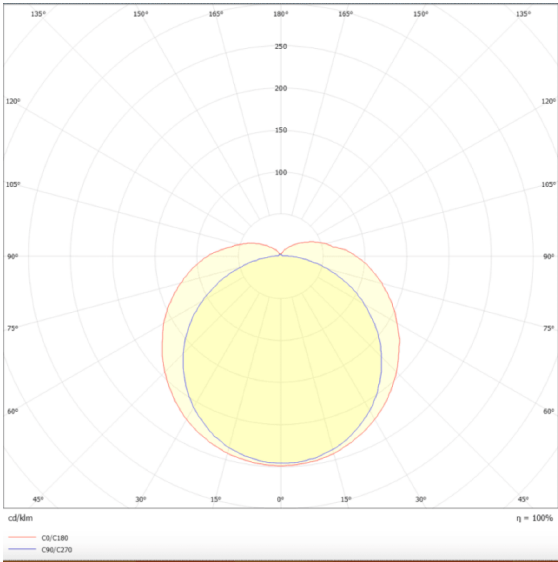

Product	
Real power (W)	45
Real luminous flux (Lm)	6000
Luminous efficiency (Lm/W)	133
Beam angle (°)	130
Life time (h)	50000h L80B10
IP	69
Control gear	ON-OFF
Colour temperature (K)	4000
Colour consistency (SDCM)	SDCM<3
CRI	80