



Dimensions


Product dimensions (mm) 120x86x1128mm

Scheme

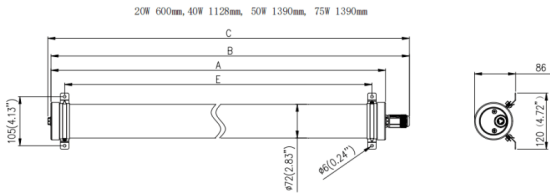

Photometry

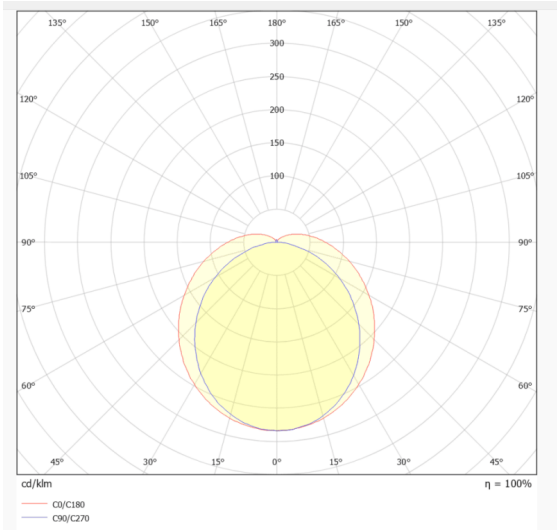

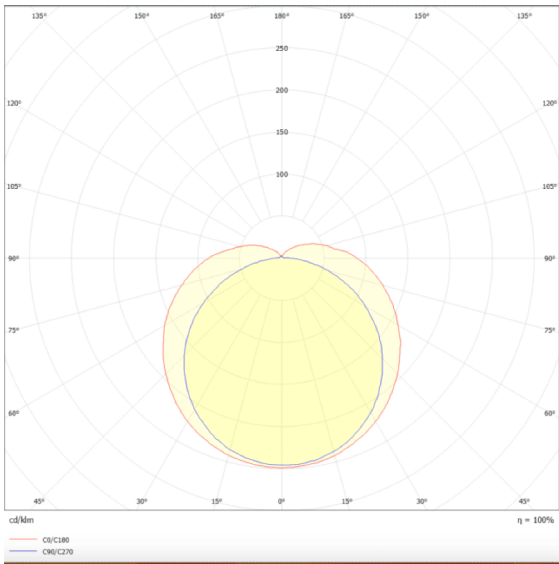

TUBEPROOF

Item code	86.I008.2403.01
Product type	Indoor
Category	Industrial
Family	TUBEPROOF
Subfamily	TUBEPROOF

Pictograms



Product	
Real power (W)	40
Real luminous flux (Lm)	6600
Luminous efficiency (Lm/W)	165
Beam angle (°)	120°
Life time (h)	60,000hrs-L90B50
IP	66
Control gear	DALI
Colour temperature (K)	4000
Colour consistency (SDCM)	SDCM<3
CRI	80
IK	IK10