




TUBEPROOF

| | |
|--------------|--|
| Item code | 86.I008.3401.01 |
| Product type | Indoor |
| Category | Industrial |
| Family | TUBEPROOF |
| Subfamily | TUBEPROOF |
| Pictograms | <div><div></div><div>220 240 V</div><div></div><div>IK 09</div><div>CRI 80</div><div>CE</div><div></div><div>On Off</div><div></div><div>IP 69</div><div>50000h L90B10</div></div> |


Dimensions

Product dimensions (mm) 120x86x1390mm

Scheme

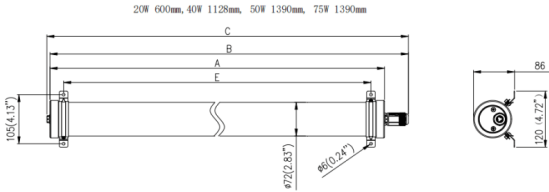

Photometry

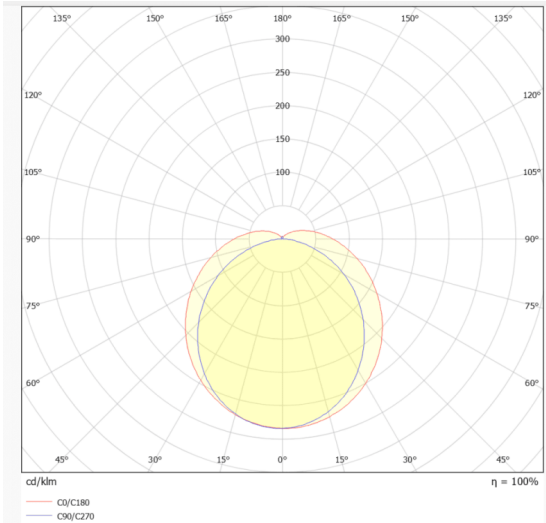

| | |
|----------------------------|------------------|
| Product | |
| Real power (W) | 50 |
| Real luminous flux (Lm) | 8250 |
| Luminous efficiency (Lm/W) | 165 |
| Beam angle (°) | 120° |
| Life time (h) | 60,000hrs-L90B50 |
| IP | 66 |
| Control gear | ON-OFF |
| Colour temperature (K) | 4000 |
| Colour consistency (SDCM) | SDCM<3 |
| CRI | 80 |
| IK | IK10 |

