





## Dimensions

<b>Product dimensions (mm)</b>	<b>170(Dia)X101(H)mm</b>
--------------------------------	--------------------------



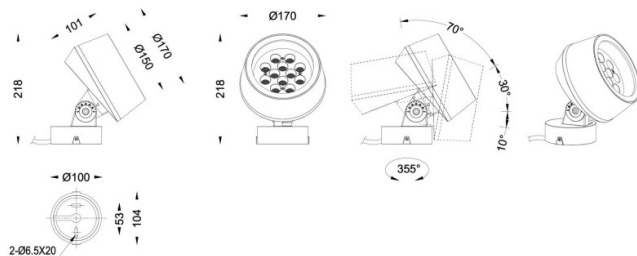




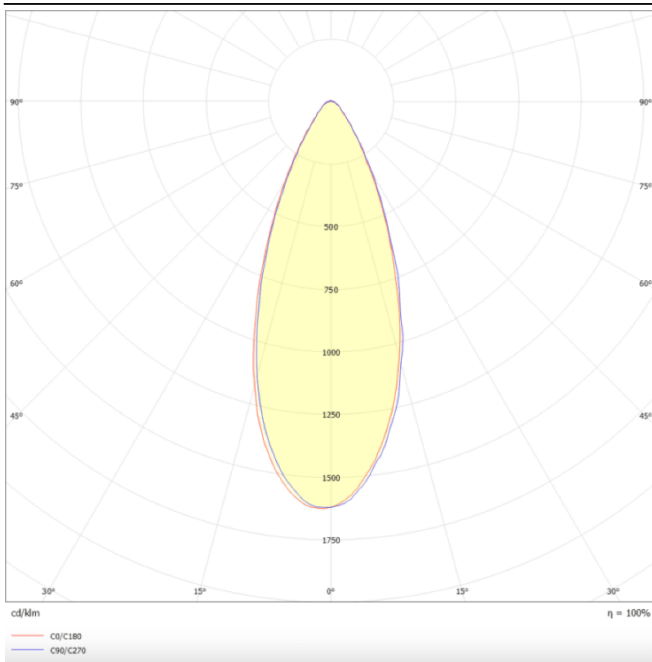

### Scheme



## Photometry



## BEAM MODULES

Item code	86.OS01.3341.02
Product type	Outdoor
Category	Spike Spot Light
Family	BEAM
Subfamily	BEAM MODULES
Pictograms	<div><div><div>220 240 850°</div></div><div><div>CRI 80</div></div><div><div>SDCM 3</div></div></div> <div><div><div>Driver INCL.</div></div><div><div>On Off</div></div><div><div>50000h L70B10</div></div></div> <div><div><div>IP 65</div></div><div><div>335° 90°</div></div><div><div>IK 05</div></div></div>

Product	
Real power (W)	36
Real luminous flux (Lm)	2450
Luminous efficiency (Lm/W)	68.0555555555556
Beam angle (°)	40
Life time (h)	50000h L70B10
IP	66
Chip Brand	Osram
Control gear	ON-OFF
Average life time (h)	50000h L70B10
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	80
IK	IK08