





Dimensions

Product dimensions (mm) 170(Dia)X101(H)mm

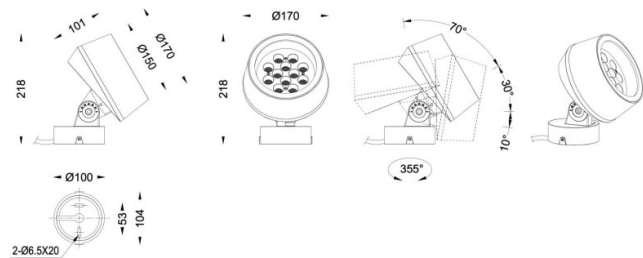





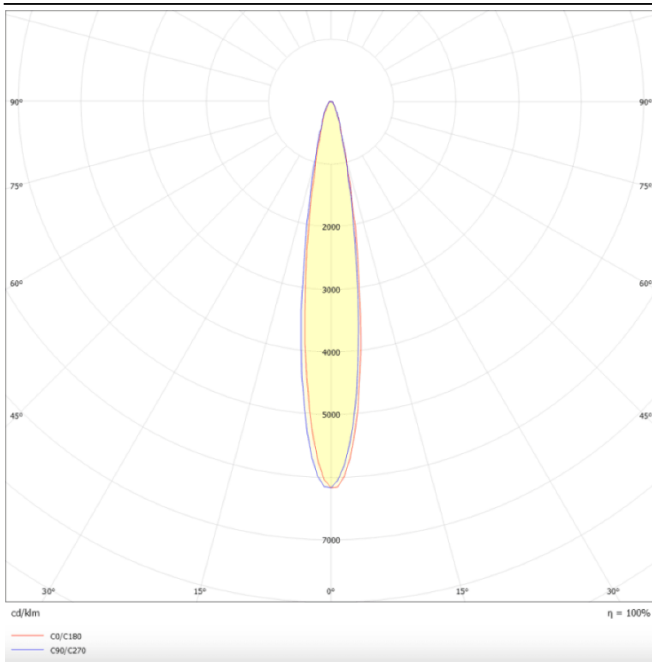


Scheme



Photometry



## BEAM MODULES

|              |   |
|--------------|---|
| Item code    | 86.OS01.3321.03   |
| Product type | Outdoor   |
| Category     | Spike Spot Light  |
| Family       | BEAM  |
| Subfamily    | BEAM MODULES  |
| Pictograms   | <div><div><div>220<br/>240<br/>850°</div></div><div><div>CRI<br/>80</div></div><div><div>SDCM<br/>3</div></div></div> <div><div><div>Driver<br/>INCL.</div></div><div><div>On<br/>Off</div></div><div><div>50000h<br/>L70B10</div></div></div> <div><div><div>IP<br/>65</div></div><div><div>335°<br/>90°</div></div><div><div>IK<br/>05</div></div></div> |

|                            |                   |
|----------------------------|-------------------|
| Product                    |                   |
| Real power (W)             | 36                |
| Real luminous flux (Lm)    | 2450              |
| Luminous efficiency (Lm/W) | 68.05555555555556 |
| Beam angle (°)             | 15                |
| Life time (h)              | 50000h L70B10     |
| IP                         | 66                |
| Chip Brand                 | Osram             |
| Control gear               | ON-OFF            |
| Average life time (h)      | 50000h L70B10     |
| Colour temperature (K)     | 3000              |
| Colour consistency (SDCM)  | SDCM<3            |
| CRI                        | 80                |
| IK                         | IK08              |