

















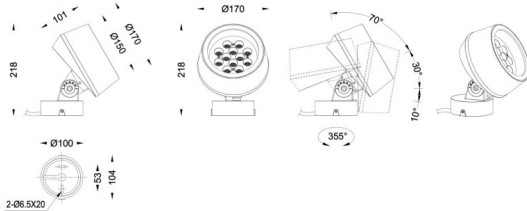
BEAM MODULES

| | |
|--------------|--|
| Item code | 86.OS02.2031.03 |
| Product type | Outdoor |
| Category | Spike Spot Light |
| Family | BEAM |
| Subfamily | BEAM MODULES |
| Pictograms | <div><div> 850°</div><div> 850°</div><div> CRI 80</div><div> SDCM 3</div><div> CE</div></div> <div><div> No Driver</div><div></div><div></div><div> 50000h L70B10</div><div> IP 65</div></div> <div><div> 335°</div><div> 90°</div><div> IK 05</div><div> 24 VDC</div></div> |


Dimensions

| | |
|--------------------------------|--------------------------|
| Product dimensions (mm) | 170(Dia)X101(H)mm |
|--------------------------------|--------------------------|

Scheme



Photometry

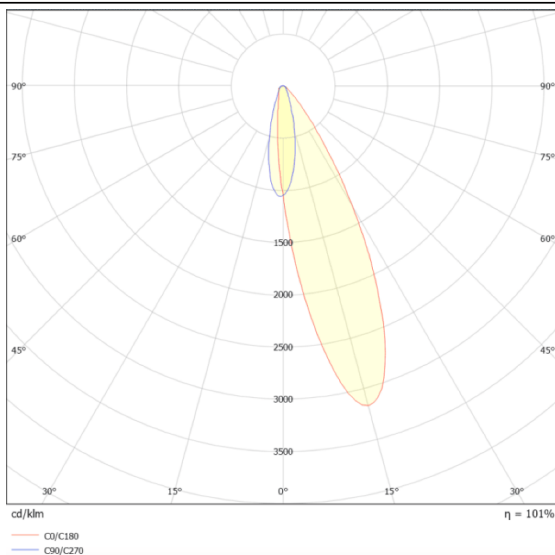

| | |
|----------------------------|---------------|
| Product | |
| Real power (W) | 42 |
| Real luminous flux (Lm) | 840 |
| Luminous efficiency (Lm/W) | 20 |
| Beam angle (°) | 24 |
| Life time (h) | 50000h L70B10 |
| IP | 66 |
| Chip Brand | Osram |
| Average life time (h) | 50000h L70B10 |
| Colour temperature (K) | RGBW 4 in 1 |
| Colour consistency (SDCM) | SDCM<3 |
| CRI | 80 |
| IK | IK08 |