




---

---

**Scheme**


---

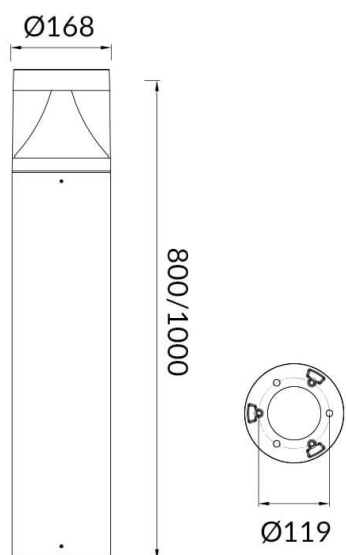

---

---



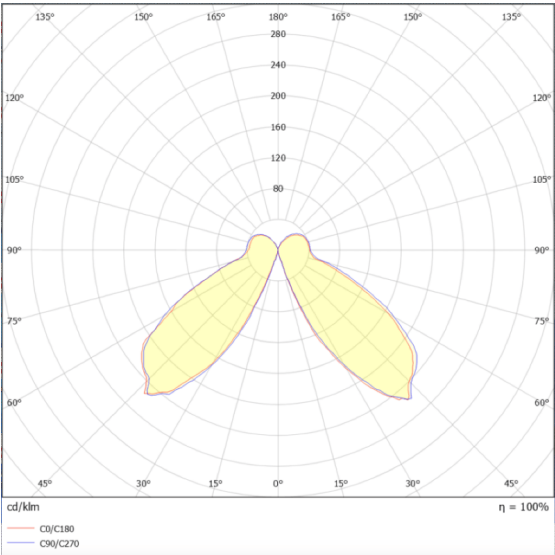


**Photometry**










TONDO

Item code	86.OB02.2311.02
Product type	Outdoor
Category	Bollards
Family	TONDO

Pictograms







Product	
Real power (W)	25
Real luminous flux (Lm)	1650
Luminous efficiency (Lm/W)	66
Beam angle (°)	Assymetric
Life time (h)	50000h L70B10
IP	65
Chip Brand	SUNPU
Control gear	ON-OFF
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	75
IK	IK08