











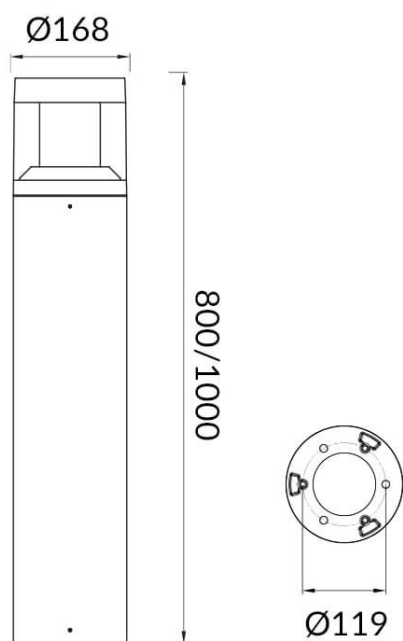

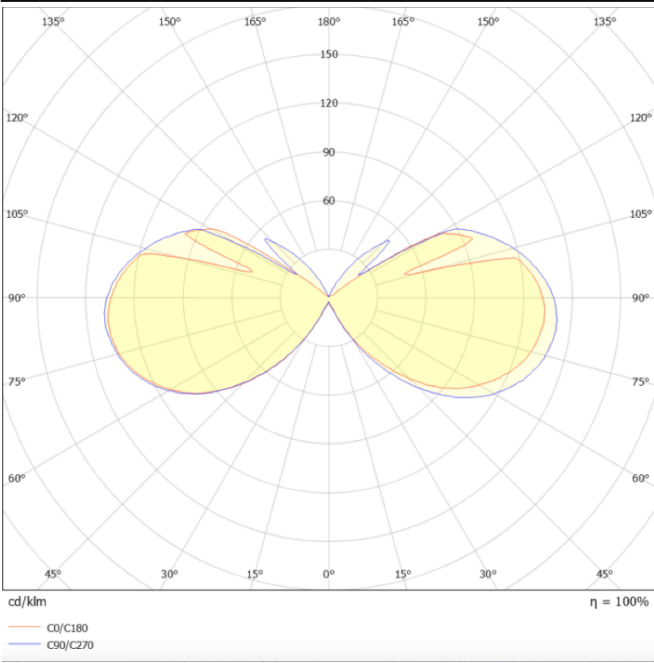

Scheme



Photometry



TONDO FLAT

Item code	86.OB03.3311.02
Product type	Outdoor
Category	Bollards
Family	TONDO FLAT
Pictograms	<div><div> 50 60 Hz</div><div> 220 240 V</div><div> 850°</div><div> CRI 80</div></div> <div><div> SDCM 3</div><div> CE</div><div> Driver INCL.</div><div> 50000h L70B10</div></div> <div><div> IP 65</div><div> IK 08</div></div>

Product	
Real power (W)	25
Real luminous flux (Lm)	2250
Luminous efficiency (Lm/W)	90
Beam angle (°)	Assymetric
Life time (h)	50000h L70B10
IP	65
Chip Brand	SUNPU
Control gear	ON-OFF
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	75
IK	IK08