





Scheme

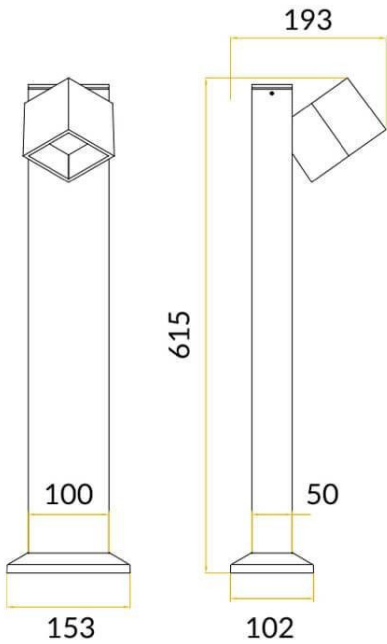

Photometry

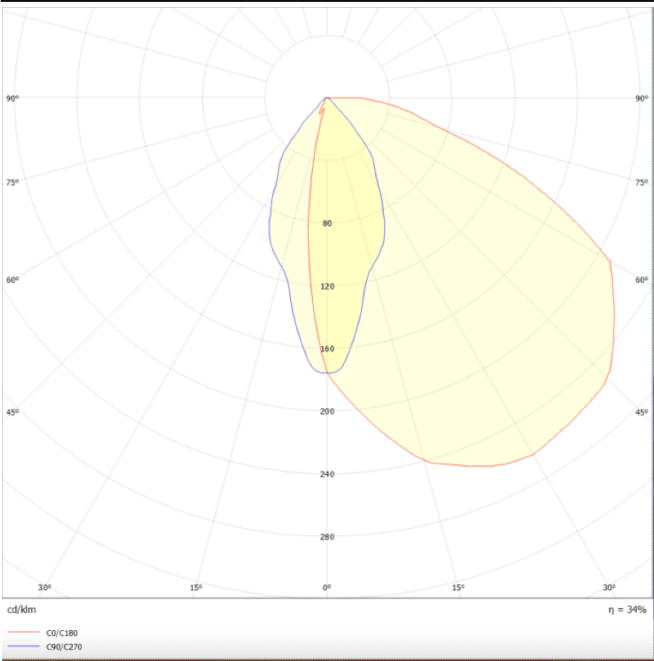

SPOT

Item code	86.OB05.1311.02
Product type	Outdoor
Category	Bollards
Family	SPOT & SPOT DUO
Subfamily	SPOT
Pictograms	<div><div></div><div><div>50 60</div>Hz</div><div><div>220 240</div>V</div><div><div></div>850°</div><div><div>CRI</div>80</div></div> <div><div><div>SDCM</div>3</div><div></div><div><div>Driver</div>INCL.</div><div></div><div><div>50000h</div>L70B10</div></div> <div><div><div>IP</div>65</div><div><div>IK</div>08</div></div>

Product	
Real power (W)	8
Real luminous flux (Lm)	460
Luminous efficiency (Lm/W)	57.5
Beam angle (°)	Assymetric
Life time (h)	50000h L70B10
IP	65
Chip Brand	SUNPU
Control gear	ON-OFF
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	75
IK	IK08