





Scheme

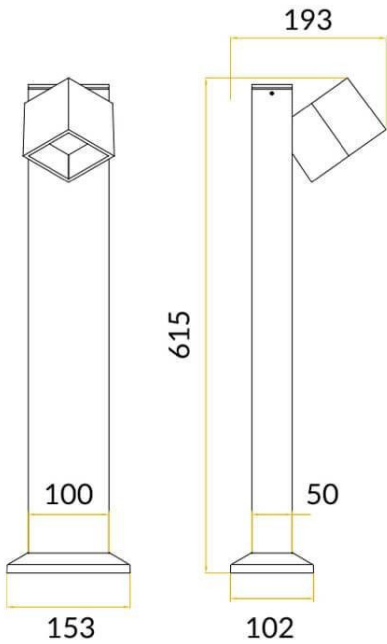

Photometry

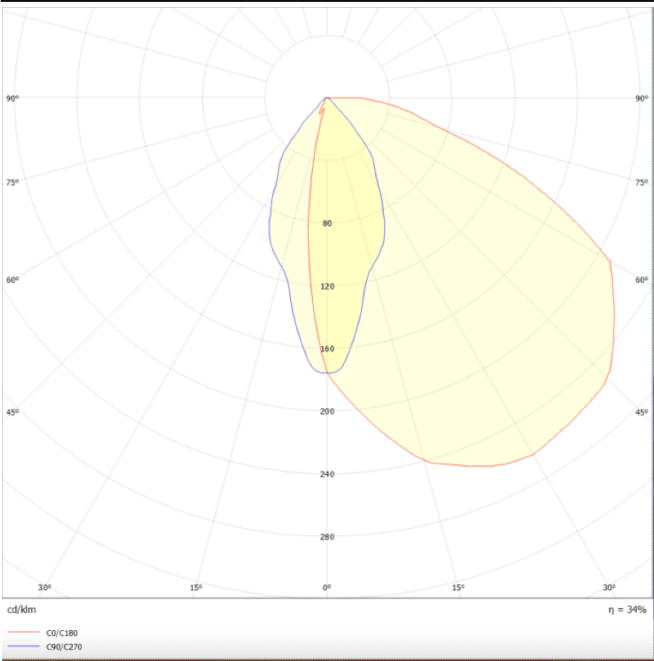

SPOT

| | |
|--------------|--|
| Item code | 86.OB05.1311.02 |
| Product type | Outdoor |
| Category | Bollards |
| Family | SPOT & SPOT DUO |
| Subfamily | SPOT |
| Pictograms | <div><div></div><div><div>50 60</div>Hz</div><div><div>220 240</div>V</div><div><div></div>850°</div><div><div>CRI</div>80</div></div> <div><div><div>SDCM</div>3</div><div></div><div><div>Driver</div>INCL.</div><div></div><div><div>50000h</div>L70B10</div></div> <div><div>IP</div>65</div> <div><div>IK</div>08</div> |

| | |
|----------------------------|---------------|
| Product | |
| Real power (W) | 8 |
| Real luminous flux (Lm) | 460 |
| Luminous efficiency (Lm/W) | 57.5 |
| Beam angle (°) | Assymetric |
| Life time (h) | 50000h L70B10 |
| IP | 65 |
| Chip Brand | SUNPU |
| Control gear | ON-OFF |
| Colour temperature (K) | 3000 |
| Colour consistency (SDCM) | SDCM<3 |
| CRI | 75 |
| IK | IK08 |