


SPOT DUO

|              |  |
|--------------|--|
| Item code    | 86.OB05.2311.02  |
| Product type | Outdoor  |
| Category     | Bollards   |
| Family       | SPOT & SPOT DUO  |
| Subfamily    | SPOT DUO   |
| Pictograms   | <div><div></div><div>50<br/>60 Hz</div><div>220<br/>240 V</div><div><br/>850°</div><div>CRI<br/>80</div></div> <div><div>SDCM<br/>3</div><div>CE</div><div>Driver<br/>INCL.</div><div></div><div>50000h<br/>L70B10</div></div> <div><div>IP<br/>65</div><div>IK<br/>08</div></div> |

Scheme

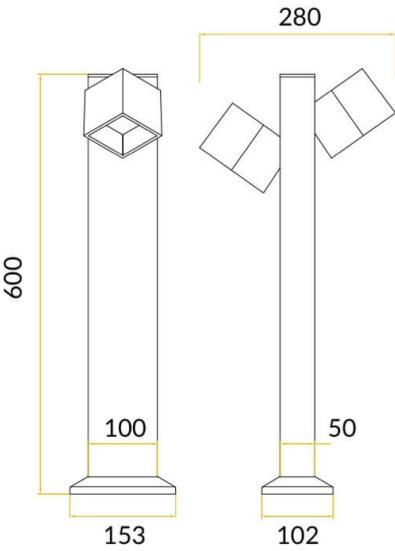

|                            |               |
|----------------------------|---------------|
| Product                    |               |
| Real power (W)             | 16            |
| Real luminous flux (Lm)    | 920           |
| Luminous efficiency (Lm/W) | 57.5          |
| Beam angle (°)             | Assymetric    |
| Life time (h)              | 50000h L70B10 |
| IP                         | 65            |
| Chip Brand                 | SUNPU         |
| Control gear               | ON-OFF        |
| Colour temperature (K)     | 3000          |
| Colour consistency (SDCM)  | SDCM3         |
| CRI                        | 75            |
| IK                         | IK08          |

Photometry

