

ING-XL




|              |  |
|--------------|--|
| Item code    | 86.OIN5.1311.07  |
| Product type | Outdoor  |
| Category     | Recessed Inground Floor  |
| Family       | ING  |
| Subfamily    | ING-XL   |
| Pictograms   | <div><div></div><div>50<br/>60 Hz</div><div>220<br/>240 V</div><div></div><div>850°</div><div>IK<br/>10</div></div> <div><div>CRI<br/>80</div><div>SDCM<br/>3</div><div>CE</div><div>Driver<br/>INCL</div><div>On<br/>Off</div></div> <div><div></div><div>50000h<br/>L80B10</div><div>IP<br/>67</div></div> |

Dimensions

Product dimensions (mm)                      Ø210x181mm

Scheme

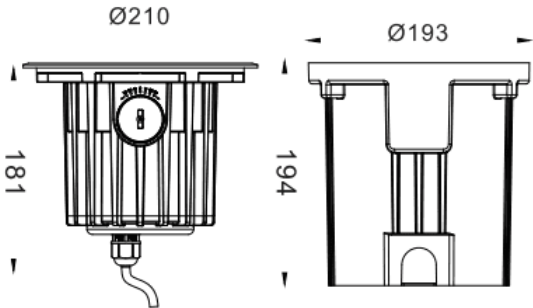

Photometry

|                            |               |
|----------------------------|---------------|
| Product                    |               |
| Real power (W)             | 20            |
| Real luminous flux (Lm)    | 1250          |
| Luminous efficiency (Lm/W) | 62.5          |
| Beam angle (°)             | 12            |
| Life time (h)              | 50000h L80B10 |
| IP                         | 67            |
| Control gear               | ON-OFF        |
| Colour temperature (K)     | 3000          |
| Colour consistency (SDCM)  | SDCM3         |
| CRI                        | 80            |
| IK                         | IK10          |

