





Scheme

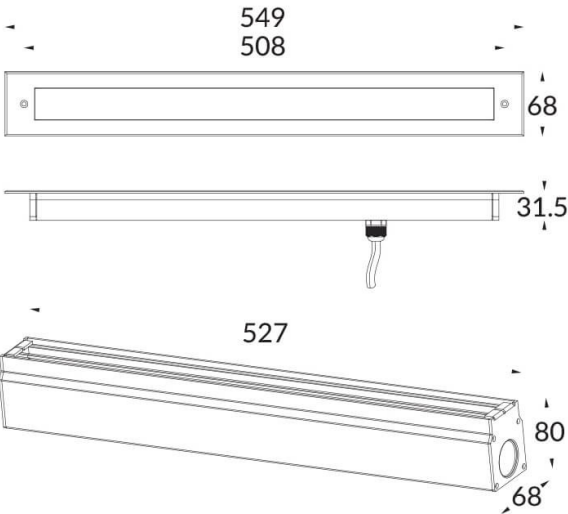

Photometry

RECESSED INGROUND FLOOR -
LINEAR

Item code 86.OIN8.1311.03

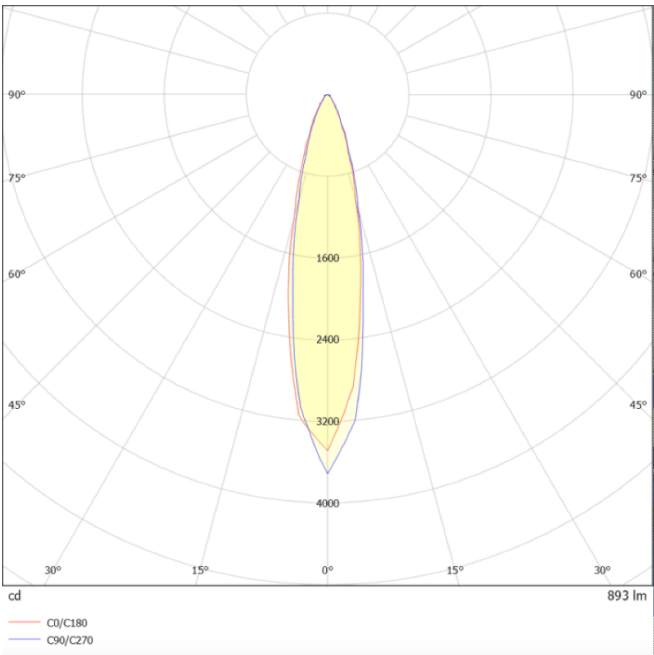

LINEAR-SYM

| | |
|--------------|---|
| Item code | 86.OIN8.1311.03 |
| Product type | Outdoor |
| Category | Recessed Inground Floor |
| Family | LINEAR |
| Subfamily | LINEAR-SYM |
| Pictograms | <div><div></div><div>50 60 Hz</div><div>220 240 V</div><div></div><div>CRI 80</div></div> <div><div>SDCM 3</div><div>CE</div><div>Driver INCL.</div><div></div><div>50000h L80B10</div></div> <div><div>IK 07</div><div>IP 67</div></div> |

| | |
|----------------------------|---------------|
| Product | |
| Real power (W) | 17.5 |
| Real luminous flux (Lm) | 1020 |
| Luminous efficiency (Lm/W) | 58.29 |
| Beam angle (°) | 20 |
| Life time (h) | 50000h L80B10 |
| IP | 67 |
| Control gear | ON-OFF |
| Colour temperature (K) | 3000 |
| Colour consistency (SDCM) | SDCM<3 |
| CRI | 80 |
| IK | 07 |