





Scheme

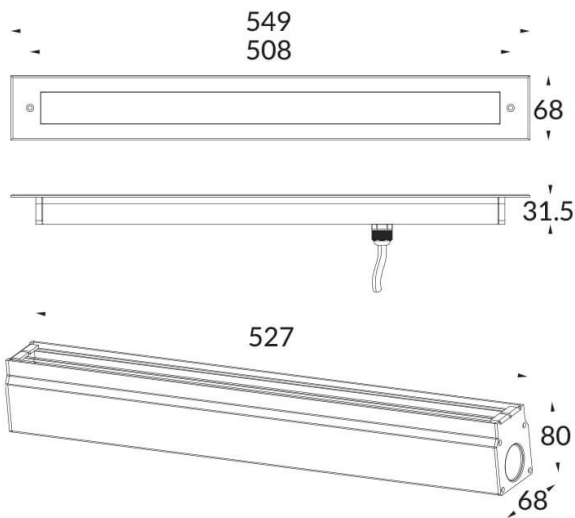

Photometry

RECESSED INGROUND FLOOR -  
LINEAR

Item code 86.OIN8.1381.03

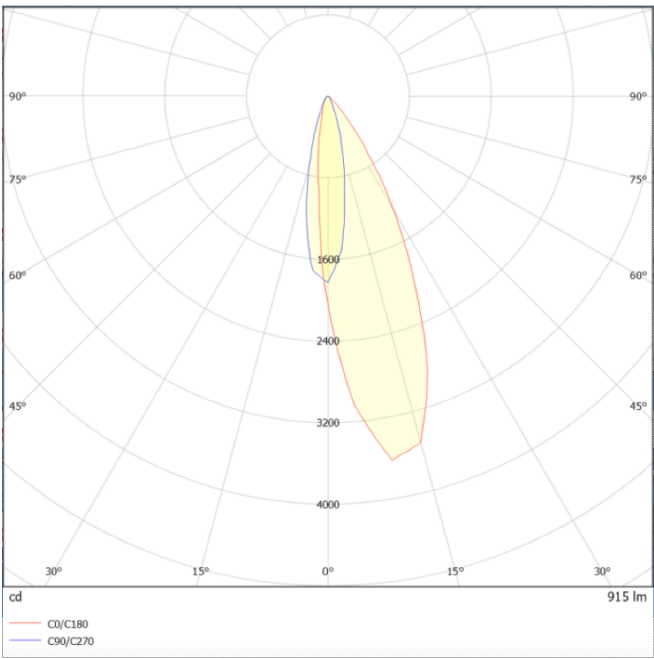

LINEAR-ASSYM

|              |                         |
|--------------|-------------------------|
| Item code    | 86.OIN8.1381.03         |
| Product type | Outdoor                 |
| Category     | Recessed Inground Floor |
| Family       | LINEAR                  |
| Subfamily    | LINEAR-ASSYM            |

Pictograms

50  
60 Hz

220  
240 V

CRI  
80

SDCM  
3

Driver  
INCL.

IK  
07

IP  
67

|                            |                     |
|----------------------------|---------------------|
| Product                    |                     |
| Real power (W)             | 17.5                |
| Real luminous flux (Lm)    | 1020                |
| Luminous efficiency (Lm/W) | 58.29               |
| Beam angle (°)             | 45/35° Asymmetrical |
| Life time (h)              | 50000h L80B10       |
| IP                         | 67                  |
| Control gear               | ON-OFF              |
| Colour temperature (K)     | 3000                |
| Colour consistency (SDCM)  | SDCM<3              |
| CRI                        | 80                  |
| IK                         | 07                  |