





Scheme

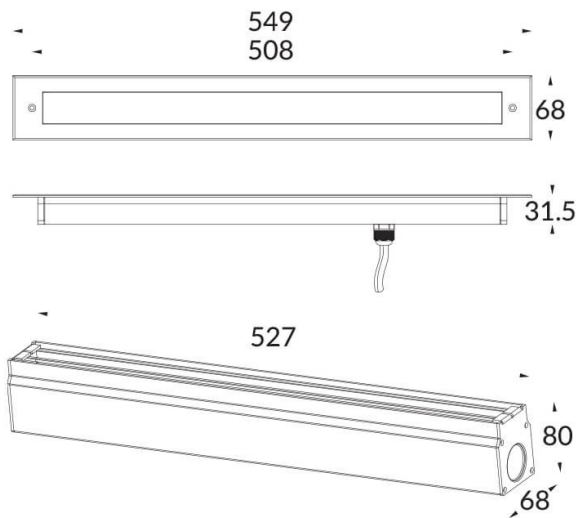

Photometry

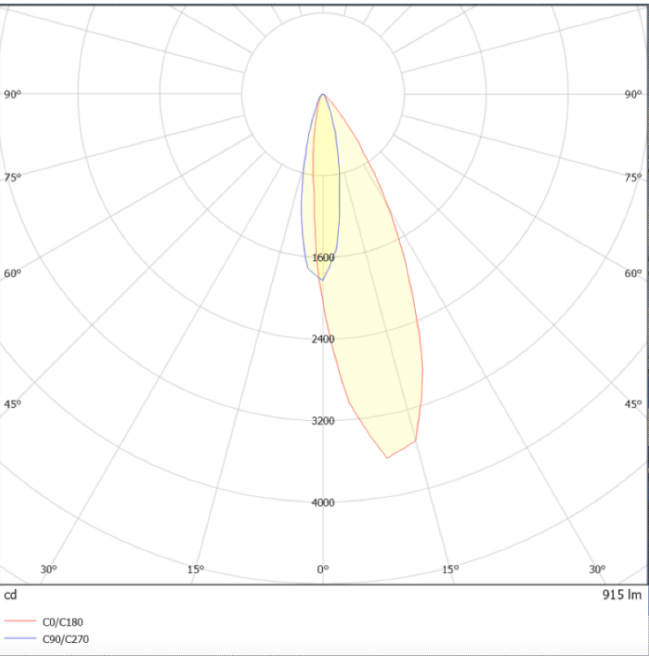

LINEAR-ASSYM

Item code	86.OIN8.1381.03
Product type	Outdoor
Category	Recessed Inground Floor
Family	LINEAR
Subfamily	LINEAR-ASSYM

Pictograms

50  
60 Hz

220  
240 V

850°

CRI

80

SDCM

3

CE

Driver

INCL.

50000h  
L80B10

IK

07

IP

67

Product	
Real power (W)	17.5
Real luminous flux (Lm)	1020
Luminous efficiency (Lm/W)	58.29
Beam angle (°)	45/35° Asymmetrical
Life time (h)	50000h L80B10
IP	67
Control gear	ON-OFF
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	80
IK	07