





Scheme

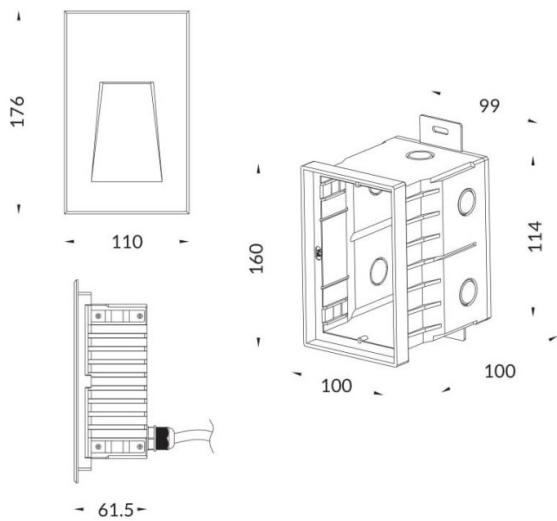

Photometry

RECESSED WALL & CEILING -  
WINDOW





Item code 86.ORW1.1351.03

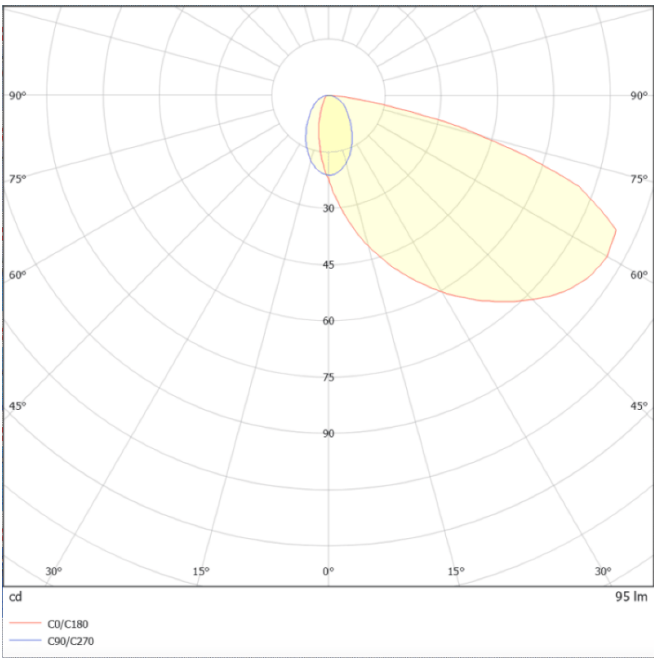








WINDOW

Item code	86.ORW1.1351.03
Product type	Outdoor
Category	Recessed Wall & Ceiling
Family	WINDOW

Pictograms







Product	
Real power (W)	7.1
Real luminous flux (Lm)	85
Luminous efficiency (Lm/W)	12
Beam angle (°)	Assymetric
Life time (h)	50000h L70B10
IP	65
Control gear	On-Off
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	80
IK	IK10