




---

---

**Scheme**


---

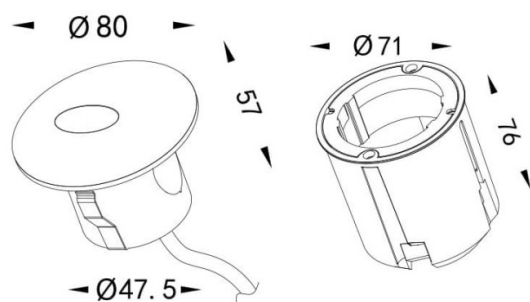

---

---

**Photometry**

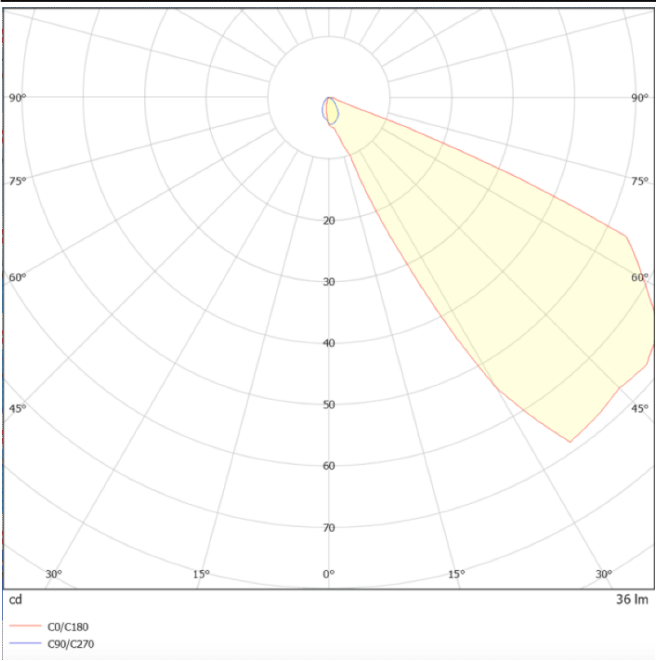

STEP

|              |   |
|--------------|---|
| Item code    | 86.ORW2.1351.07   |
| Product type | Outdoor   |
| Category     | Recessed Wall & Ceiling   |
| Family       | STEP  |
| Pictograms   | <div><div></div><div>50<br/>60 Hz</div><div>220<br/>240 V</div><div></div><div>IK<br/>10</div></div> <div><div>CRI<br/>80</div><div>SDCM<br/>3</div><div>CE</div><div>Driver<br/>INCL.</div><div></div></div> <div><div>50000h<br/>L70B10</div><div>IP<br/>65</div></div> |

|                            |               |
|----------------------------|---------------|
| Product                    |               |
| Real power (W)             | 1.7           |
| Real luminous flux (Lm)    | 46            |
| Luminous efficiency (Lm/W) | 27            |
| Beam angle (°)             | Assymetric 45 |
| Life time (h)              | 50000h L70B10 |
| IP                         | 65            |
| Chip Brand                 | OSRAM         |
| Control gear               | ON-OFF        |
| Colour temperature (K)     | 3000          |
| Colour consistency (SDCM)  | SDCM<3        |
| CRI                        | 80            |
| IK                         | IK10          |