









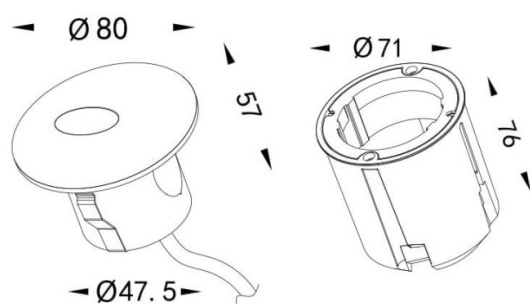

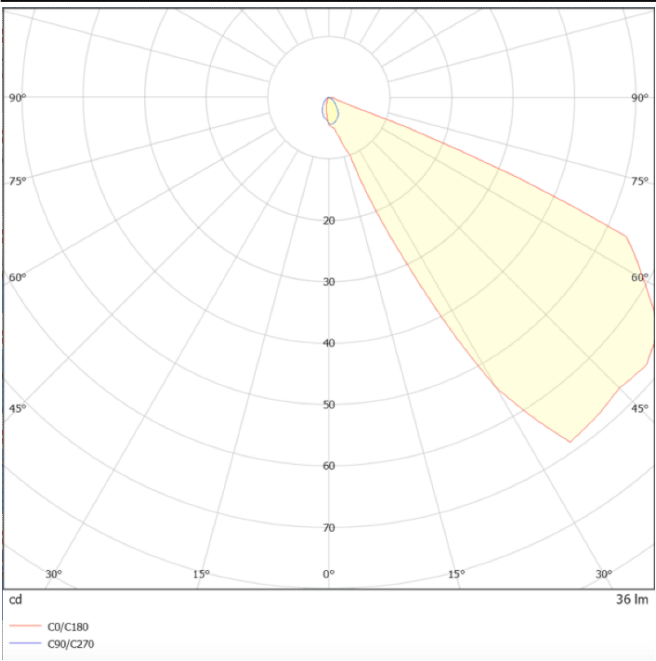




Scheme



Photometry



STEP

Item code	86.ORW2.1351.07
Product type	Outdoor
Category	Recessed Wall & Ceiling
Family	STEP
Pictograms	<div><div> 50 60 Hz</div><div> 220 240 V</div><div> 850°</div><div> IK 10</div><div> CRI 80</div><div> SDCM 3</div><div></div><div> Driver INCL</div><div></div><div> 50000h L70B10</div><div> IP 65</div></div>

Product	
Real power (W)	1.7
Real luminous flux (Lm)	46
Luminous efficiency (Lm/W)	27
Beam angle (°)	Assymetric 45
Life time (h)	50000h L70B10
IP	65
Chip Brand	OSRAM
Control gear	ON-OFF
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	80
IK	IK10