









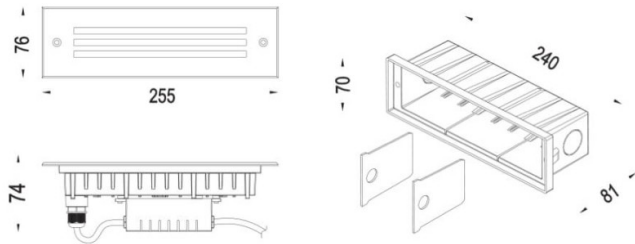

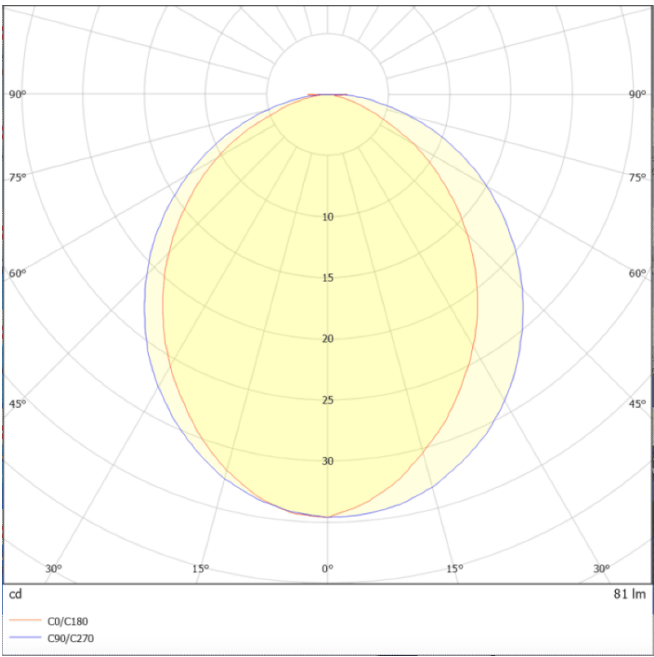

Scheme



Photometry



WALLR

Item code	86.ORW9.1301.07
Product type	Outdoor
Category	Recessed Wall & Ceiling
Family	WALLR
Pictograms	<div><div> 50 60 Hz</div><div> 220 240 V</div><div> 850°</div><div> CRI 80</div></div> <div><div> SDCM 3</div><div> CE</div><div> Driver INCL.</div><div> 50000h L70B10</div></div> <div><div> IP 65</div><div> IK 09/10</div></div>

Product	
Real power (W)	6.8
Real luminous flux (Lm)	90
Luminous efficiency (Lm/W)	13.24
Beam angle (°)	120
Life time (h)	50000h L70B10
IP	65
Chip Brand	Epistar
Control gear	ON-OFF
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	80
IK	IK10