



WALLR

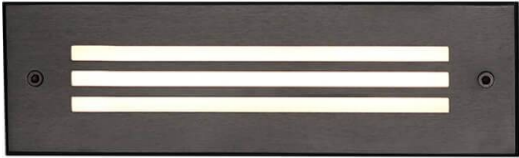

| | |
|--------------|---|
| Item code | 86.ORW9.1301.07 |
| Product type | Outdoor |
| Category | Recessed Wall & Ceiling |
| Family | WALLR |
| Pictograms | <div><div></div><div>50 60 Hz</div><div>220 240 V</div><div></div><div>850°</div><div>CRI 80</div></div> <div><div>SDCM 3</div><div></div><div>Driver INCL.</div><div></div><div>50000h L70B10</div></div> <div><div>IP 65</div><div>IK 09/10</div></div> |

| | |
|----------------------------|---------------|
| Product | |
| Real power (W) | 6.8 |
| Real luminous flux (Lm) | 90 |
| Luminous efficiency (Lm/W) | 13.24 |
| Beam angle (°) | 120 |
| Life time (h) | 50000h L70B10 |
| IP | 65 |
| Chip Brand | Epistar |
| Control gear | ON-OFF |
| Colour temperature (K) | 3000 |
| Colour consistency (SDCM) | SDCM<3 |
| CRI | 80 |
| IK | IK10 |

Scheme

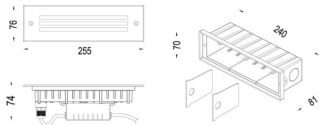

Photometry

