





#### Scheme

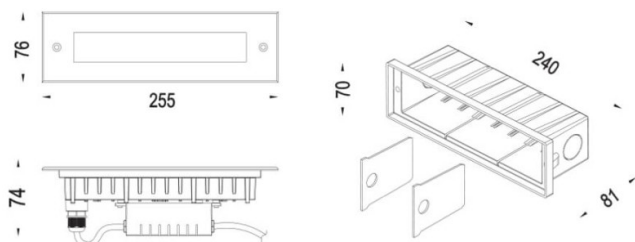

#### Photometry

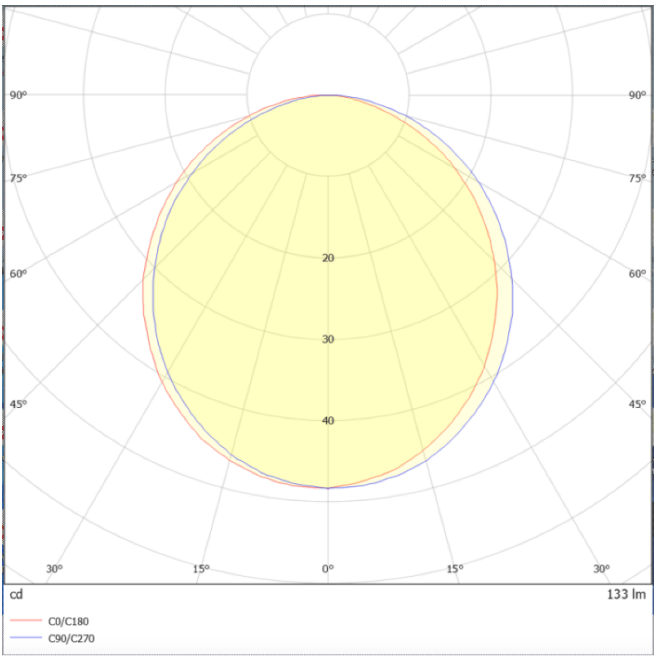

WALLR

Item code	86.ORW9.2301.07
Product type	Outdoor
Category	Recessed Wall & Ceiling
Family	WALLR
Pictograms	<div><div></div><div>50 60 Hz</div><div>220 240 V</div><div></div><div>850°</div><div>CRI 80</div></div> <div><div>SDCM 3</div><div>CE</div><div>Driver INCL.</div><div></div><div>50000h L70B10</div></div> <div><div>IP 65</div><div>IK 09/10</div></div>

Product	
Real power (W)	6.8
Real luminous flux (Lm)	132
Luminous efficiency (Lm/W)	19.41
Beam angle (°)	120
Life time (h)	50000h L70B10
IP	65
Chip Brand	Epistar
Control gear	ON-OFF
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	80
IK	IK09