


## UP&DOWNT

| | |
|---|---|
| **Item code** | **86.OW09.1311.02** |
| **Product type** | **Outdoor** |
| **Category** | **Wall Light** |
| **Family** | **UP&DOWNT** |
| **Pictograms** | 50 60 Hz · 850° · CRI 80 · SDCM 3 · CE · Driver INCL. · 50000h L70B10 · IP 65 · IK 05 |


| **Dimensions** | |
|---|---|
| **Product dimensions (mm)** | **ø53x73x160mm** |

**Scheme**

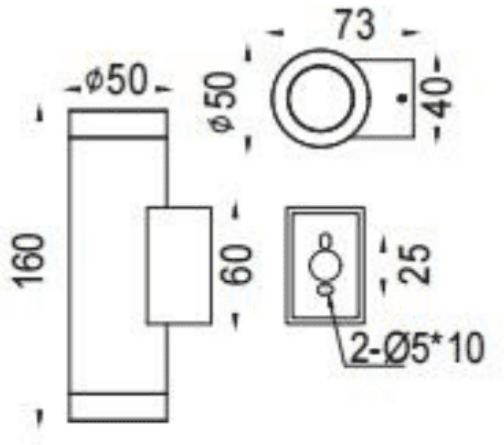


| **Product** | |
|---|---|
| **Real power (W)** | **2x4** |
| **Real luminous flux (Lm)** | **2x285** |
| **Luminous efficiency (Lm/W)** | **70.5** |
| **Beam angle (º)** | **15** |
| **Life time (h)** | **50000h L70B10** |
| **IP** | **IP65** |
| **Control gear** | **ON-OFF** |
| **Colour temperature (K)** | **3000** |
| **Colour consistency (SDCM)** | **SDCM3** |
| **CRI** | **80** |
| **IK** | **IK05** |

## Photometry

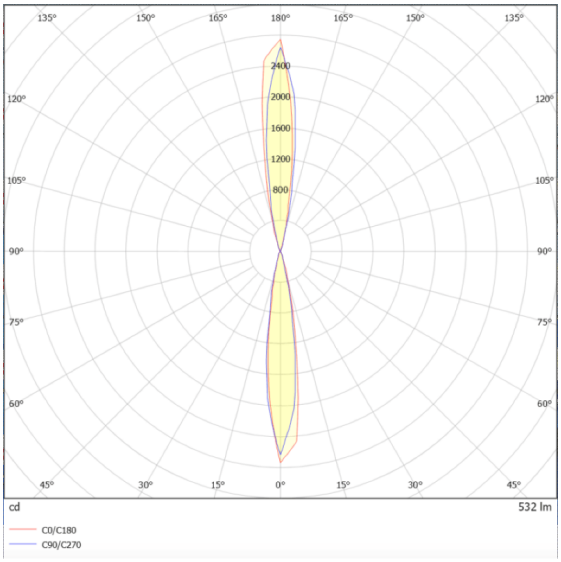
135°
150°
165°
180°
165°
150°
135°
120°
120°
105°
105°
90°
90°
75°
75°
60°
60°
45°
30°
15°
0°
15°
30°
45°
2400
2000
1600
1200
800
cd
532 lm
C0/C180
C90/C270