WALL LIGHT - UP&DOWNT **Item code 86.OW09.3311.02**

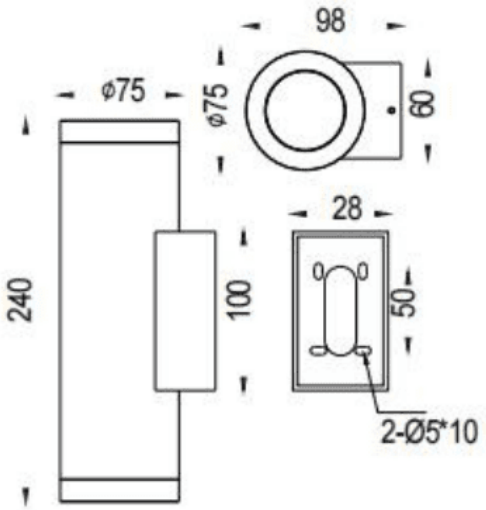


UP&DOWNT

Item code	**86.OW09.3311.02**
Product type	**Outdoor**
Category	**Wall Light**
Family	**UP&DOWNT**
Pictograms	

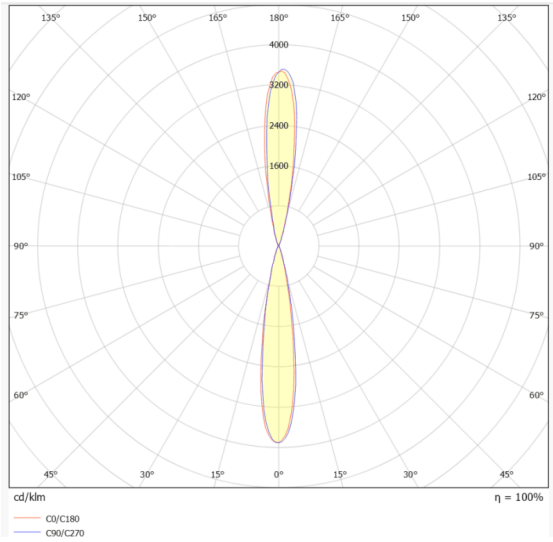
Dimensions	
Product dimensions (mm)	**ø75x98x240mm**

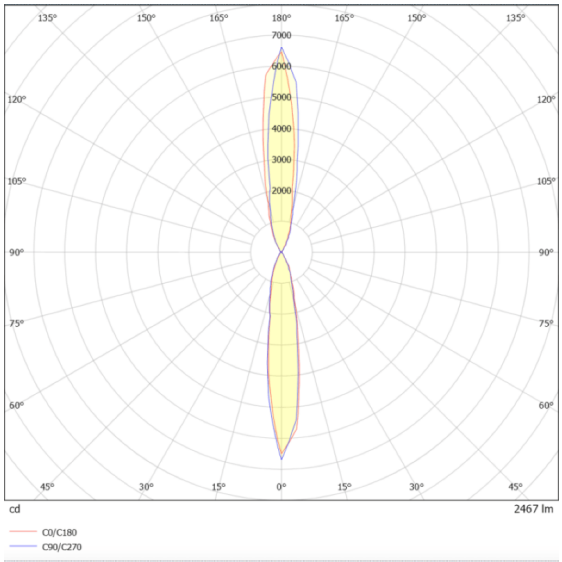
Scheme



Product	
Real power (W)	**2x12.5**
Real luminous flux (Lm)	**2x1082**
Luminous efficiency (Lm/W)	**86.56**
Beam angle (º)	**12**
Life time (h)	**50000h L70B10**
IP	**IP65**
Control gear	**ON-OFF**
Colour temperature (K)	**3000**
Colour consistency (SDCM)	**SDCM3**
CRI	**80**
IK	**IK05**

Photometry


135° 150° 165° 180° 165° 150° 135°
4000
3200
2400
1600
120° 120°
105° 105°
90° 90°
75° 75°
60° 60°
45° 30° 15° 0° 15° 30° 45°
cd/klm
η = 100%
C0/C180
C90/C270


135° 150° 165° 180° 165° 150° 135°
7000
6000
5000
4000
3000
2000
120° 120°
105° 105°
90° 90°
75° 75°
60° 60°
45° 30° 15° 0° 15° 30° 45°
cd
2467 lm
C0/C180
C90/C270