




Dimensions

Product dimensions (mm) **74x74x90 mm**

Scheme

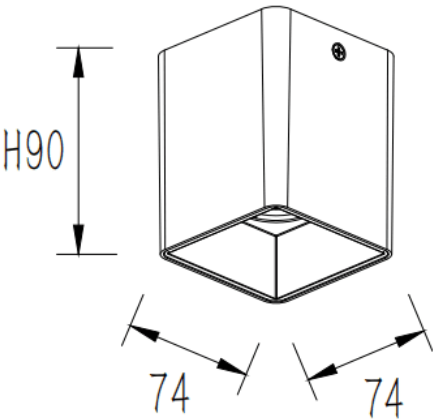

Photometry



Pictograms



| | |
|----------------------------|---------------|
| Real power (W) | 15 |
| Real luminous flux (Lm) | 1200 |
| Luminous efficiency (Lm/W) | 80 |
| Beam angle (°) | 60 |
| Life time (h) | 50000h L80B10 |
| IP | IP65 |
| Control gear | ON-OFF |
| Colour temperature (K) | 3000 |
| Colour consistency (SDCM) | SDCM<3 |
| CRI | 80 |