




**Dimensions**

**Product dimensions (mm)**                      **Ø95X152 mm**

**Scheme**

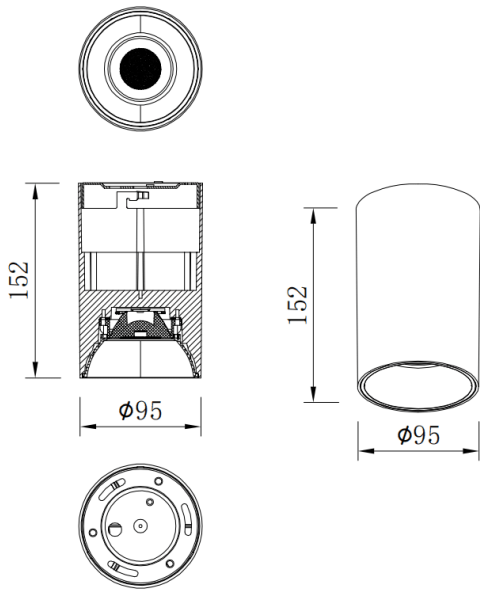

**Photometry**



## Pictograms



Real power (W)	20
Real luminous flux (Lm)	1600
Luminous efficiency (Lm/W)	80
Beam angle (°)	40
Life time (h)	50000h L80B10
IP	IP65
Control gear	ON-OFF
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	80