




Dimensions

Product dimensions (mm) **diam 160x183mm**

Scheme

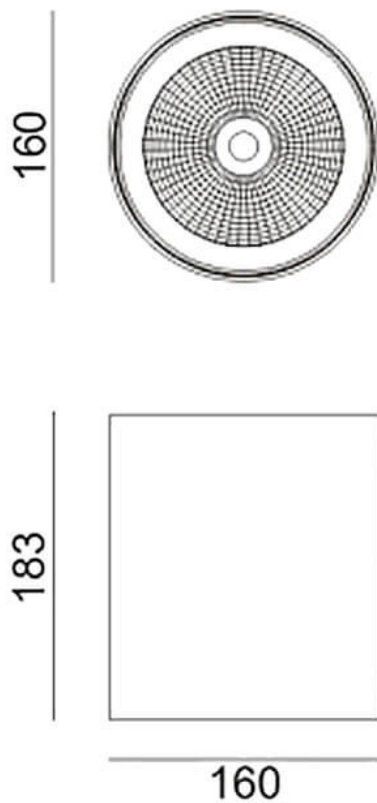

SDOWN

| | |
|--------------|---------------------------|
| Item code | 86.OC02.3321.01 |
| Product type | Outdoor |
| Category | Surface Ceiling Downlight |
| Family | SDOWN |

Pictograms

| | | | | |
|---|---|------------------------|---|------------------|
|  | 50 60 Hz | 220 240 V |  | CRI 80 |
| SDCM 3 |  | Driver INCL. |  | 50000h L80B10 |
| IP 65 | IK 06 | | | |

| Product | |
|----------------------------|---------------|
| Real power (W) | 40 |
| Real luminous flux (Lm) | 3250 |
| Luminous efficiency (Lm/W) | 81.25 |
| Beam angle (°) | 25° |
| Life time (h) | 50000h L80B10 |
| IP | 65 |
| Chip Brand | Osram |
| Control gear | ON-OFF |
| Colour temperature (K) | 3000 |
| Colour consistency (SDCM) | SDCM<3 |
| CRI | >80 |
| IK | IK06 |

Photometry

