




**Dimensions**

**Product dimensions (mm)**      **diam 160x183mm**

**Scheme**

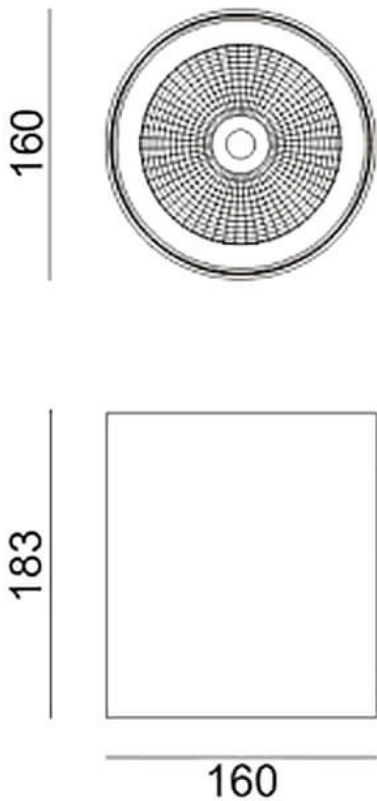

SDOWN

|              |  |
|--------------|--|
| Item code    | 86.OC02.3331.02  |
| Product type | Outdoor  |
| Category     | Surface Ceiling Downlight  |
| Family       | SDOWN  |
| Pictograms   | <div><div></div><div>50<br/>60 Hz</div><div>220<br/>240 V</div><div></div><div>850°</div><div>CRI<br/>80</div></div> <div><div>SDCM<br/>3</div><div>CE</div><div>Driver<br/>INCL.</div><div></div><div>50000h<br/>L80B10</div></div> <div><div>IP<br/>65</div><div>IK<br/>06</div></div> |

|                            |               |
|----------------------------|---------------|
| Product                    |               |
| Real power (W)             | 40            |
| Real luminous flux (Lm)    | 3250          |
| Luminous efficiency (Lm/W) | 81.25         |
| Beam angle (°)             | 40°           |
| Life time (h)              | 50000h L80B10 |
| IP                         | 65            |
| Chip Brand                 | Osram         |
| Control gear               | ON-OFF        |
| Colour temperature (K)     | 3000          |
| Colour consistency (SDCM)  | SDCM<3        |
| CRI                        | >80           |
| IK                         | IK06          |

Photometry

