










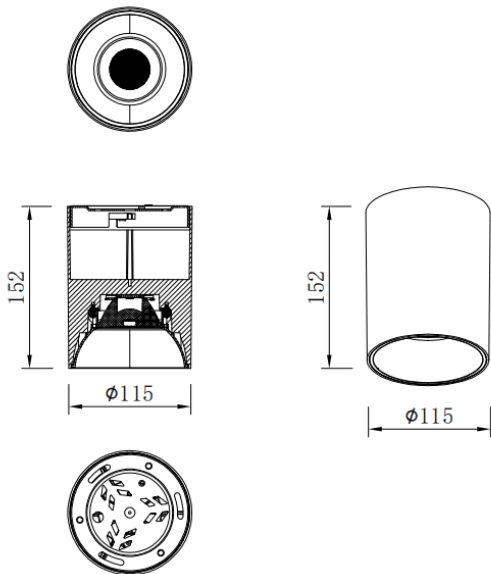


SDOWN

| | |
|--------------|--|
| Item code | 86.OC02.3331.03 |
| Product type | Outdoor |
| Category | Surface Ceiling Downlight |
| Family | SDOWN |
| Pictograms |          |

| | |
|-------------------------|-------------|
| Dimensions | |
| Product dimensions (mm) | Ø115X152 mm |

| | |
|--------|--|
| Scheme | |
|--------|--|



| | |
|----------------------------|---------------|
| Product | |
| Real power (W) | 30 |
| Real luminous flux (Lm) | 2400 |
| Luminous efficiency (Lm/W) | 80 |
| Beam angle (°) | 60 |
| Life time (h) | 50000h L80B10 |
| IP | IP65 |
| Control gear | ON-OFF |
| Colour temperature (K) | 3000 |
| Colour consistency (SDCM) | SDCM<3 |
| CRI | 80 |

| | |
|------------|--|
| Photometry | |
|------------|--|

**SURFACE CEILING DOWNLIGHT -
SDOWN**

Item code 86.OC02.3331.03

