



Scheme

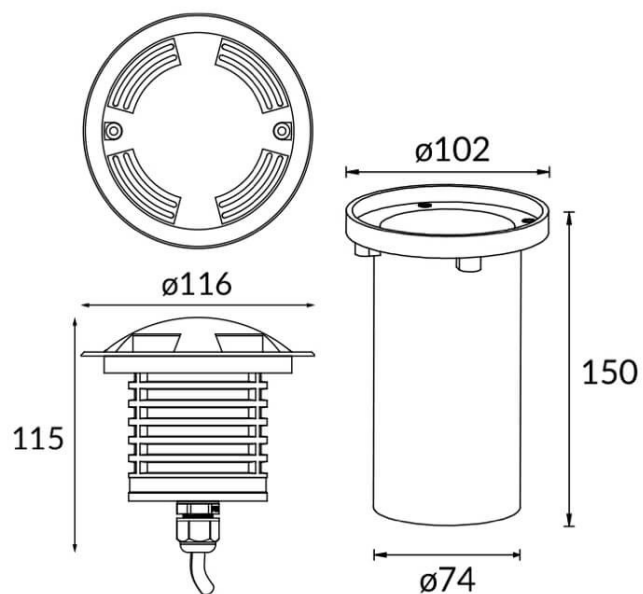

Photometry

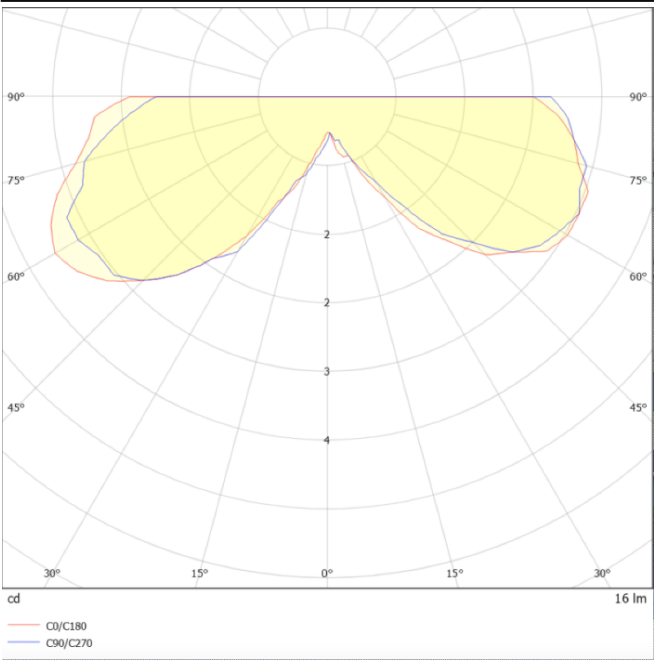

MARK-L

| | |
|--------------|-------------------------|
| Item code | 86.OIN6.3331.03 |
| Product type | Outdoor |
| Category | Recessed Inground Floor |
| Family | MARK |
| Subfamily | MARK-L |
| Pictograms | |

| | |
|----------------------------|---|
| Product | |
| Real power (W) | Die Cast Aluminium Body, Front Ring stainless Steel, Tempered Glass Cover |
| Real luminous flux (Lm) | Die Cast Aluminium Body, Front Ring stainless Steel, Tempered Glass Cover |
| Luminous efficiency (Lm/W) | Die Cast Aluminium Body, Front Ring stainless Steel, Tempered Glass Cover |
| Beam angle (°) | Die Cast Aluminium Body, Front Ring stainless Steel, Tempered Glass Cover |
| Life time (h) | Die Cast Aluminium Body, Front Ring stainless Steel, Tempered Glass Cover |
| IP | Die Cast Aluminium Body, Front Ring stainless Steel, Tempered Glass Cover |
| Operating temperature | Die Cast Aluminium Body, Front Ring stainless Steel, Tempered Glass Cover |
| Electrical feeding | Die Cast Aluminium Body, Front Ring stainless Steel, Tempered Glass Cover |
| Control gear | ON-OFF |
| Colour temperature (K) | 3000 |
| Colour consistency (SDCM) | SDCM<3 |
| CRI | 80 |
| IK | 10 |