



## Scheme

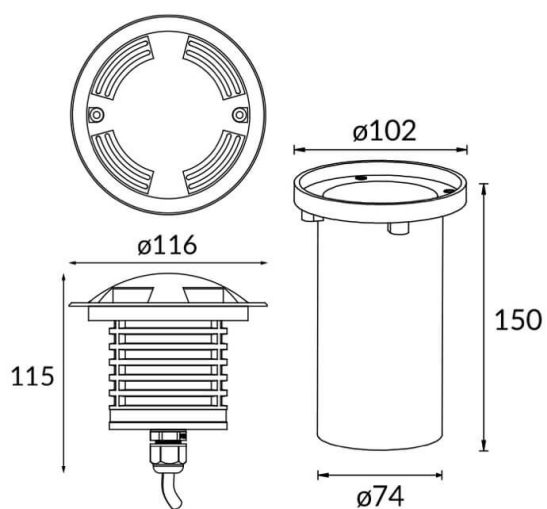

## Photometry

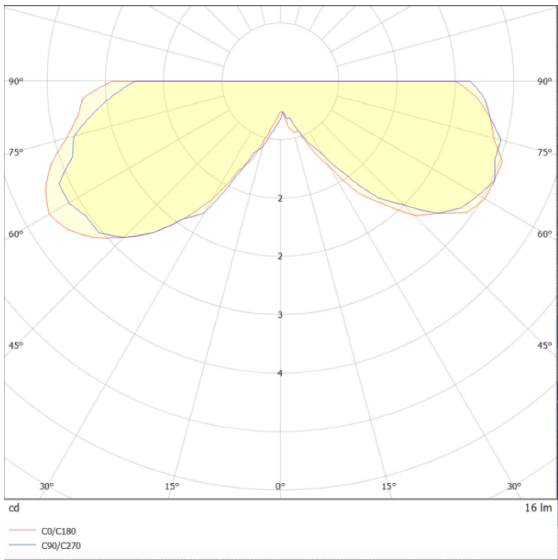

MARK-L

Item code	86.OIN6.3331.03
Product type	Outdoor
Category	Recessed Inground Floor
Family	MARK
Subfamily	MARK-L

Pictograms

Product	
Real power (W)	Die Cast Aluminium Body, Front Ring stainless Steel, Tempered Glass Cover
Real luminous flux (Lm)	Die Cast Aluminium Body, Front Ring stainless Steel, Tempered Glass Cover
Luminous efficiency (Lm/W)	Die Cast Aluminium Body, Front Ring stainless Steel, Tempered Glass Cover
Beam angle (°)	Die Cast Aluminium Body, Front Ring stainless Steel, Tempered Glass Cover
Life time (h)	Die Cast Aluminium Body, Front Ring stainless Steel, Tempered Glass Cover
IP	Die Cast Aluminium Body, Front Ring stainless Steel, Tempered Glass Cover
Operating temperature	Die Cast Aluminium Body, Front Ring stainless Steel, Tempered Glass Cover
Electrical feeding	Die Cast Aluminium Body, Front Ring stainless Steel, Tempered Glass Cover
Control gear	ON-OFF
Colour temperature (K)	3000
Colour consistency (SDCM)	SDCM<3
CRI	80
IK	10