



MARK-S

Item code	**86.OIN7.2331.03**
Product type	**Outdoor**
Category	**Recessed Inground Floor**
Family	**MARK**
Subfamily	**MARK-S**
Pictograms	


Dimensions	
Product dimensions (mm)	**Ø55X86mm**


Scheme

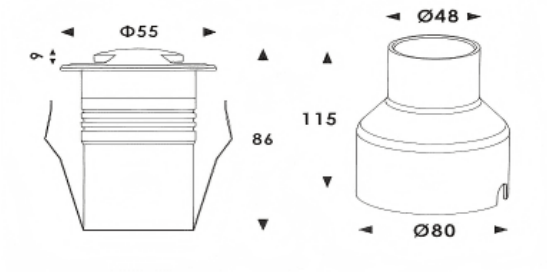

Product	
Real power (W)	**2.6**
Beam angle (º)	**assymetric**
Life time (h)	**50000h L80B10**
IP	**67**
Control gear	**ON-OFF**
Colour temperature (K)	**3000**
Colour consistency (SDCM)	**SDCM3**
CRI	**80**
IK	**IK10**

Photometry

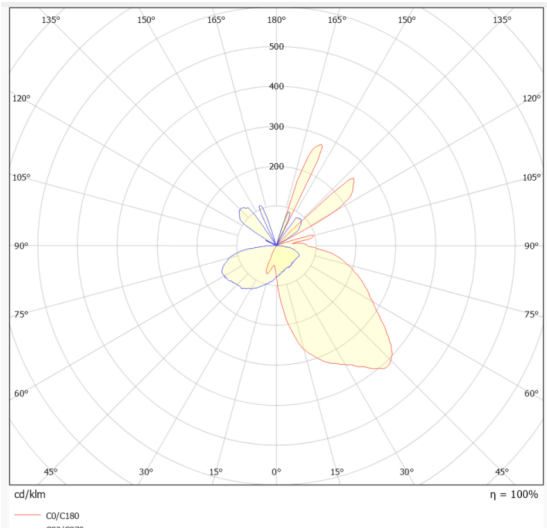
135°
150°
165°
180°
165°
150°
135°
500
400
300
200
120°
120°
105°
105°
90°
90°
75°
75°
60°
60°
45°
30°
15°
0°
15°
30°
45°
cd/klm
η = 100%
C0/C180

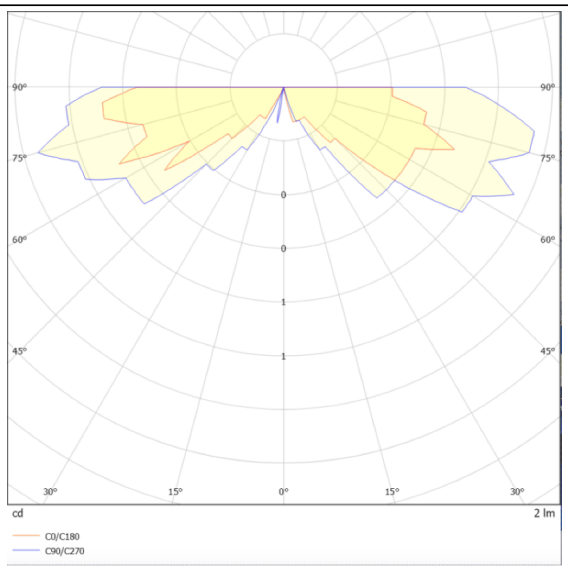
90°
90°
75°
75°
0
60°
0
60°
1
45°
1
45°
30°
15°
0°
15°
30°
cd
2 lm
C0/C180
C90/C270